

GEN4GEO ver. 1.3 – USER MANUAL

Aug. 07, 2026

Table of Contents

1. Acronyms	2
2. Quick Start	3
2.1. Step 1 – Select an area of interest	4
2.2. Step 2 – Ask a question in natural language	6
3. Free vs. Admin navigation mode	9
4. How GEN4GEO answers your questions	11
4.1. General structure of a GEN4GEO answer	11
4.2. How to customize a GEN4GEO answer	13
5. How to create a report	22
5.1. How to remove content	22
5.2. How to generate and save a report	22
5.3. How to export data	24
5.4. How to save and restore a session	25
6. How to write your prompt	27
6.1. How to ask questions	27
6.2. How to ask for data aggregation	29
6.3. How to generate a default prompt through the Datasources section	30
7. Intelligent search	32

1. Acronyms

Acronym	Meaning
Aoi	Area of Interest
LLM or llm	Large Language Model
AI	Artificial Intelligence

2. Quick Start

GEN4GEO is a dashboard that allows the exploration of geospatial data in natural language.

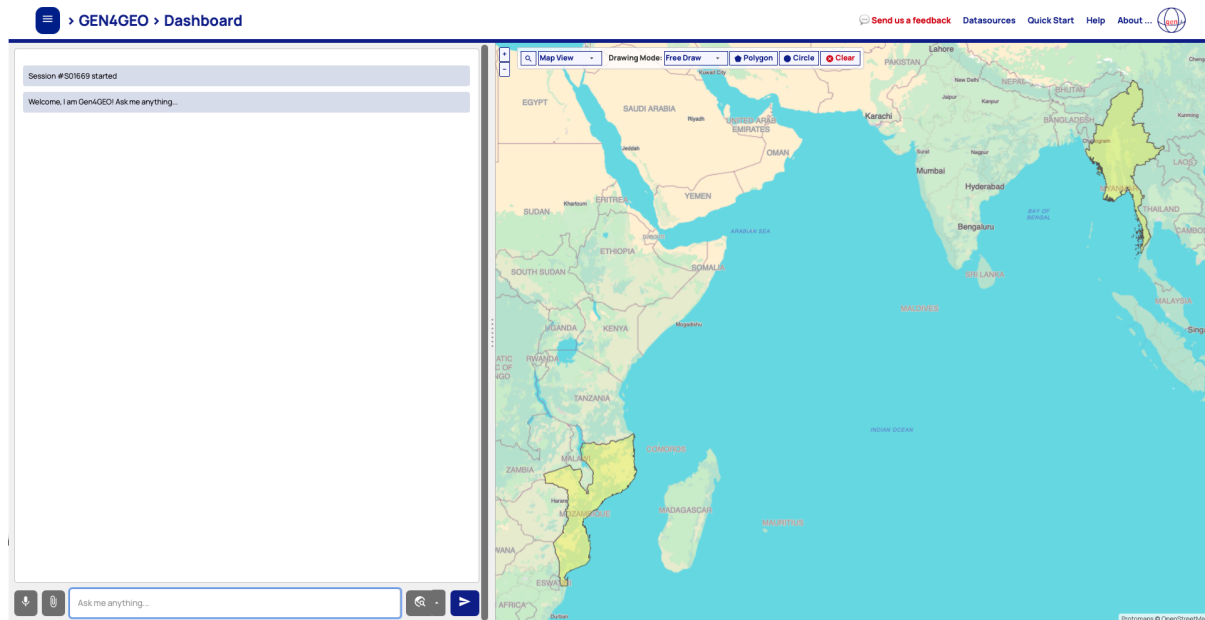


Figure 1 – GEN4GEO landing page.

During the first access, a Quick Start pop-up appears (Figure 2). Read the essential steps to be ready to use the dashboard in a few minutes. The guide is accessible at any moment from the dashboard by clicking the button 'Quick Start' from the top right menu of the landing page.

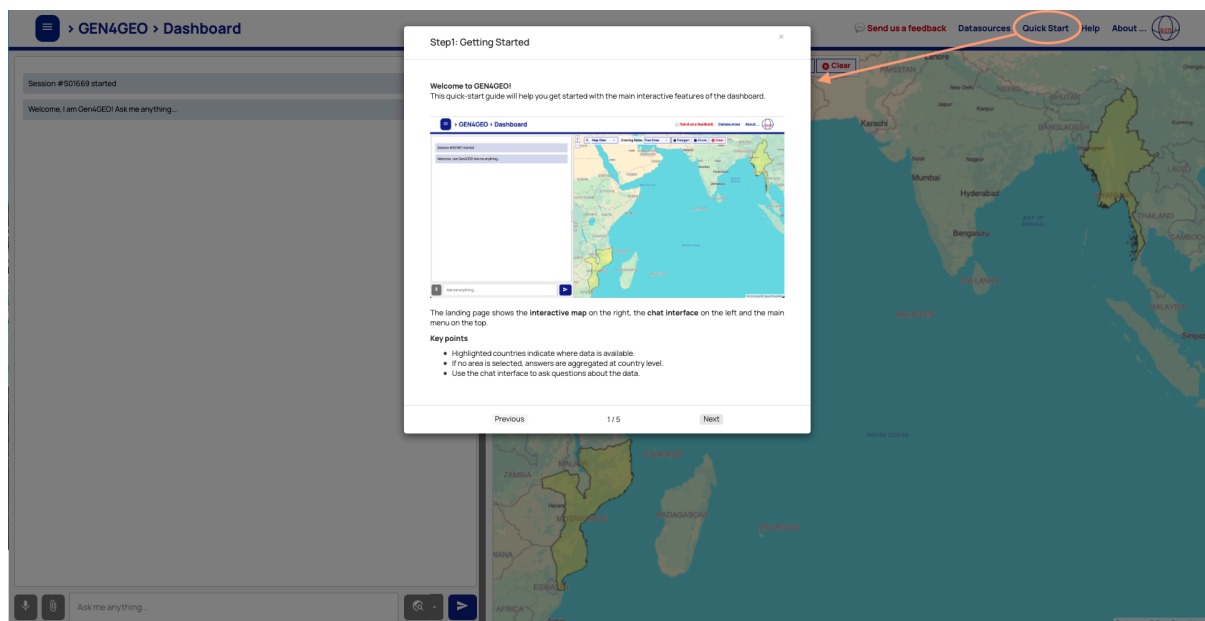


Figure 2 – GEN4GEO Quick Start pop-up guide.

2.1. Step 1 – Select an area of interest

Data exploration starts with the selection of an area of interest (Aoi) on the map shown on the right side of the GEN4GEO landing page (Figure 1).

By default, the map highlights the countries for which the dashboard can provide data. If an area of interest is not selected, questions will be answered for all available countries (highlighted in yellow in Figure 1), providing data aggregated at country level. The map can be repositioned on a different geographical area in different ways:

- By clicking on the map and dragging it as needed.
- By using the geo-search functionality of GEN4GEO, clicking on the search icon shown in Figure 3 and typing the name of the location of interest (for example, “Myanmar” or “Myanmar Naypyidaw”). This will automatically identify the location of interest and reposition the map accordingly.

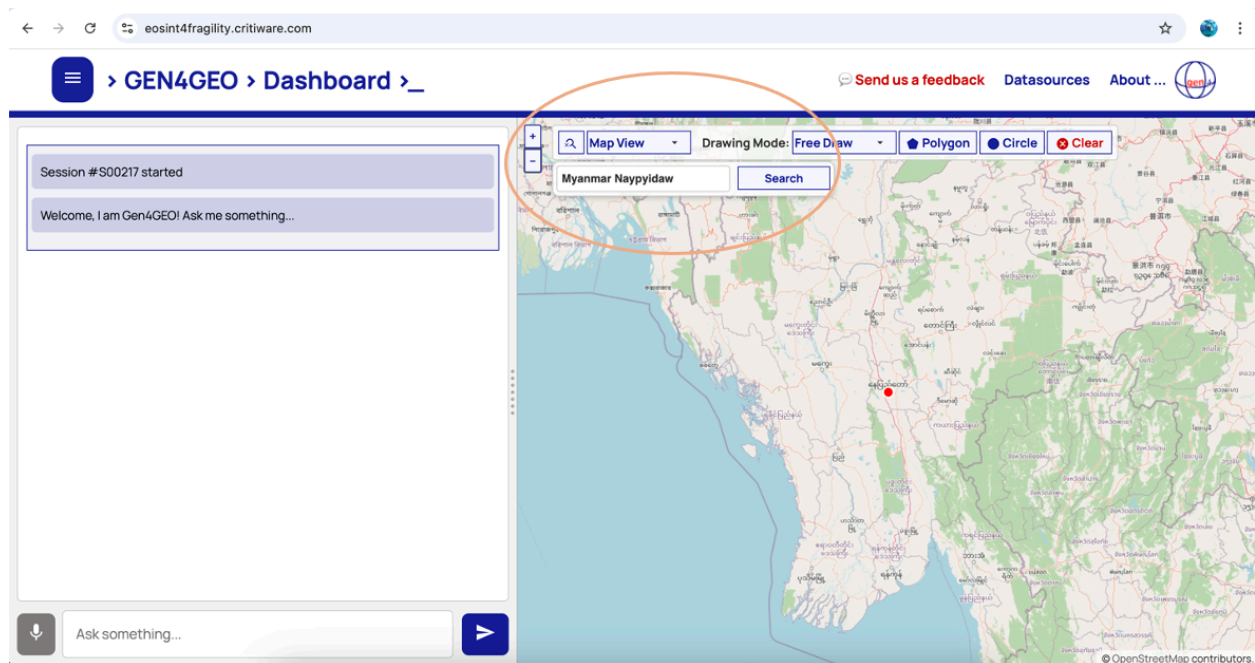


Figure 3 – How to reposition the map with geo-search.

The map can be zoomed in and out with the +/- buttons shown in Figure 4 or by using the scroll wheel of the mouse.

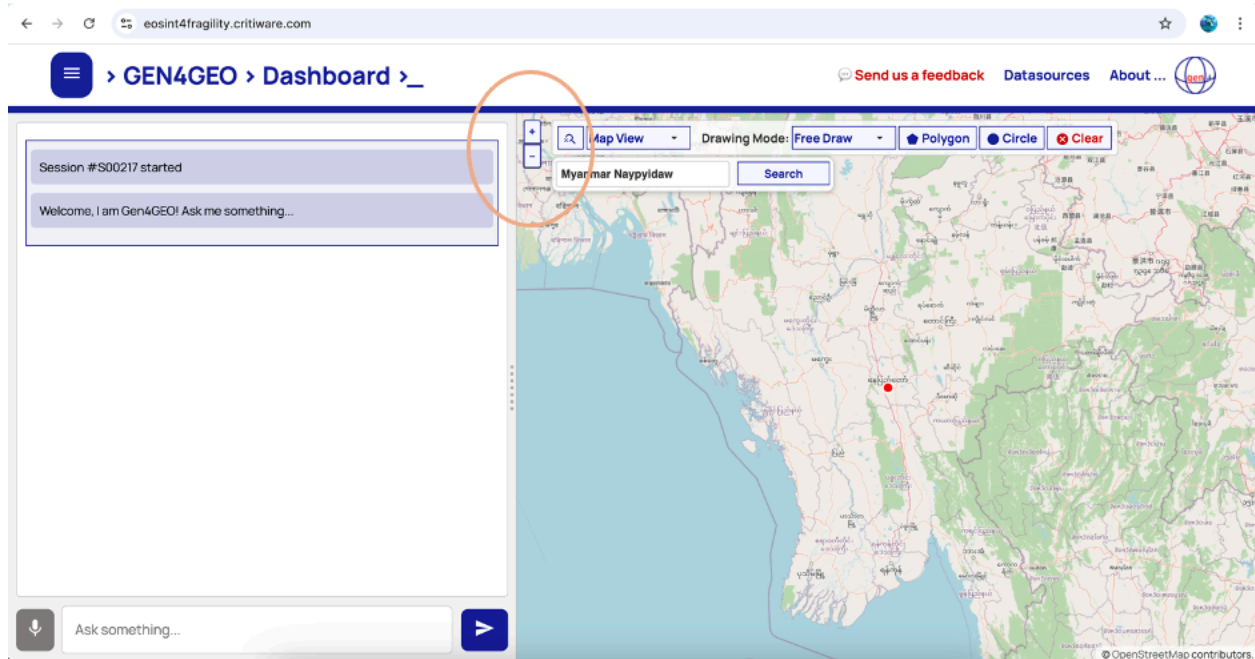


Figure 4 – How to adjust the map’s zoom level.

Once the map is positioned where needed, the area of interest (AoI) can be selected by drawing a polygon or a circle on the map. This can be done by clicking either on the “Polygon” or on the “Circle” button on the top menu, as shown in Figure 5, and then drawing the target AoI on the map.

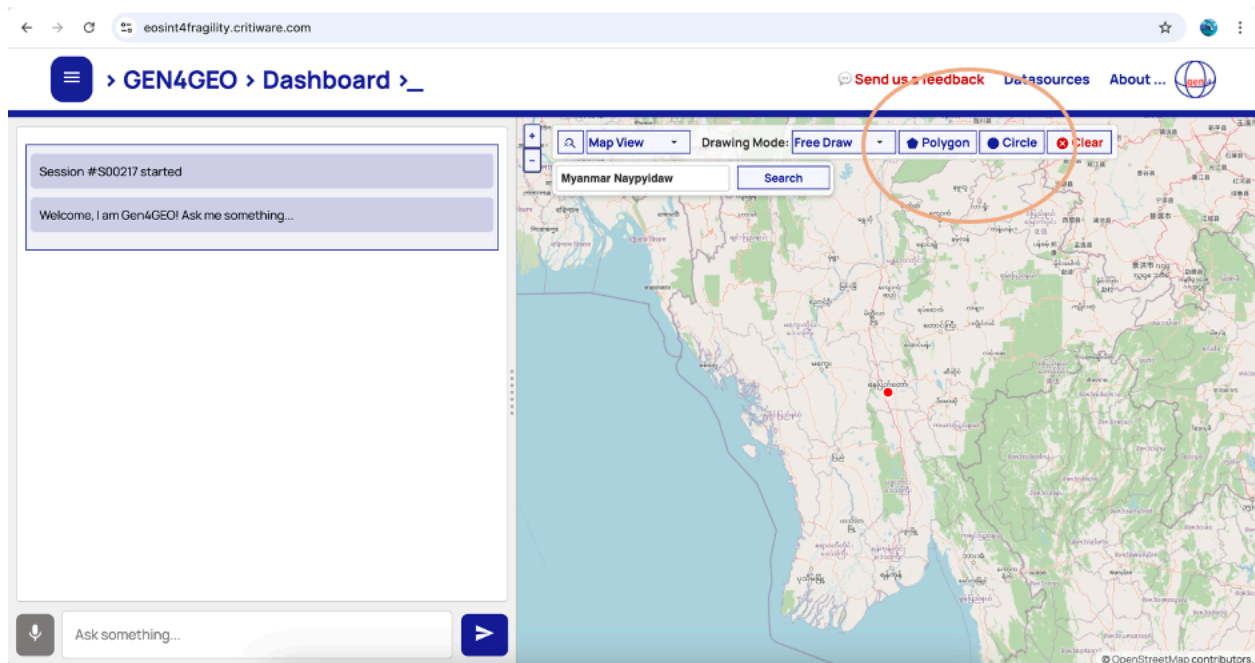


Figure 5 – How to select a drawing tool.

2.2. Step 2 – Ask a question in natural language

After selecting an area of interest, we can ask a question by typing it in the prompt box shown in Figure 6. For example, as a first question, we could ask “What data are available?”.

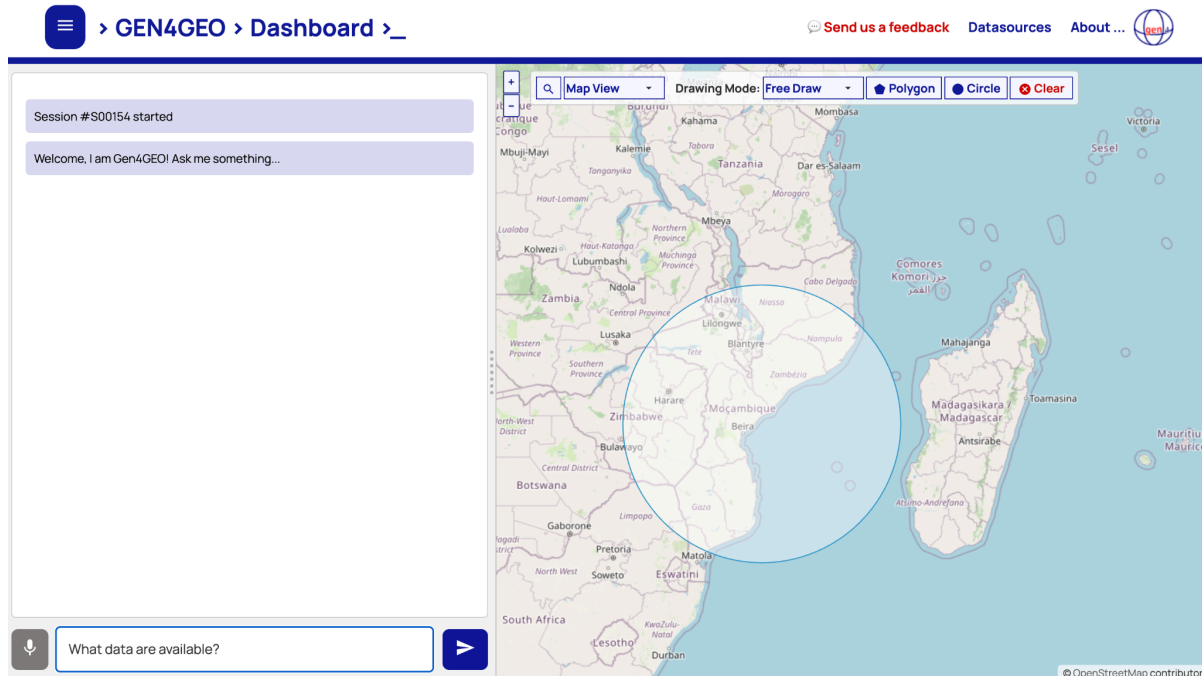


Figure 6 – How to ask a question in natural language by writing it in the prompt box.

GEN4GEO will answer with a list of the available fragility indicators as shown in Figure 7.

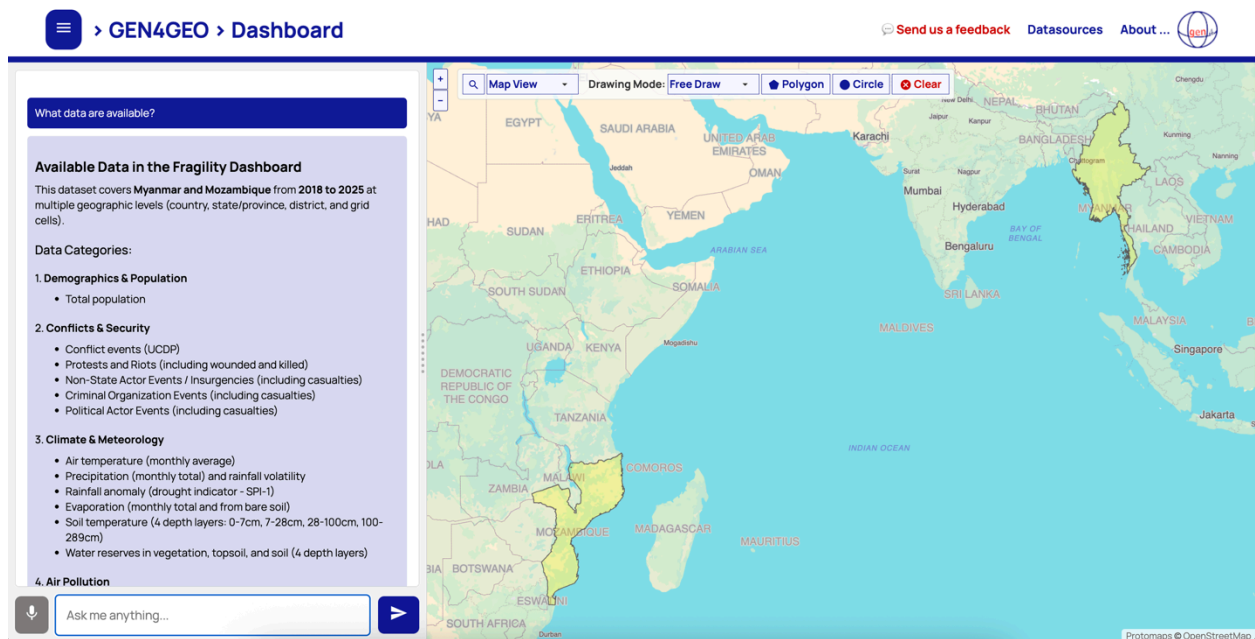


Figure 7 – GEN4GEO answer to the question “What data are available?”

The complete list of fragility indicators, together with the data sources that have been used to produce them, associated fragility dimensions and other additional information is also available by clicking on the “Datasources” button on the top menu, as shown in Figure 8.



Figure 8 – How to obtain the complete list of fragility indicators and their sources.

Figure 9. shows the list of indicators obtained by clicking on the Datasources button. The list can be scrolled with the mouse.

Use the selectors to filter the indicators by source, maximum spatial granularity, fragility dimension, or directly type a keyword.

GEN4GEO
Geospatial Fragility Database & Exploration Tool

Data dictionary

Search fields by name or description...

All Sources | Any granularity | Any category

Data classification

- Economic
- Environmental
- Human
- None
- Political
- Security
- Societal

Field Name	Source	Granularity	Description
CH4	Trigoni	Geospatial (10m x 1000)	CH4 (methane) mainly comes from human activities such as fossil fuel extraction, livestock farming, and waste management, as well as from natural sources like wetlands. The value represents the normalized CH4 concentration, scaled between the dataset minimum and maximum. (0 = 1295 Mol fraction, 1 = 2432 Mol fraction). Web: atlas.uns.lnsl
CO	Trigoni	Geospatial (10m x 1000)	CO (carbon monoxide) mainly comes from human activities such as the incomplete combustion of fossil fuels and biomass. The value represents the normalized CO concentration, scaled between the dataset minimum and maximum. (0 = 34.4 mol/m³, 1 = 5.71 mol/m³). Web: atlas.uns.lnsl
GDP PPP (const 2021 in International \$)	ADB	Admin 0 (Country)	GDP expressed in constant 2021 International dollars, converted using purchasing power parities (PPPs) to enable cross-country comparisons by removing differences in price levels and inflation over time. Web: const 2021 Billioe International \$
HCHO	Trigoni	Geospatial (10m x 1000)	HCHO (formaldehyde) mainly comes from human activities such as fossil fuel combustion, industrial processes, and biomass burning, as well as from natural sources like vegetation emissions. The value represents the normalized HCHO concentration, scaled between the dataset minimum and maximum. (0 = 0.077 mol/m³, 1 = 4.058 mol/m³). Web: atlas.uns.lnsl
HDI	Trigoni	Geospatial (10m x 1000)	HDI (Human Development Index) mainly comes from

Figure 9 – Complete list of fragility indicators.

You're now ready to use GEN4GEO and can ask your own questions. You don't need to use the exact names of indicators – GEN4GEO will interpret your query and provide information on the indicators that can help answer it.

As an alternative, the indicators in the Datasources section are clickable, as shown in Figure 10. If you want to generate prompts in the chat automatically, you can directly click the name of an indicator: you will see a default question that can be customized (see section 6.1 for more details).

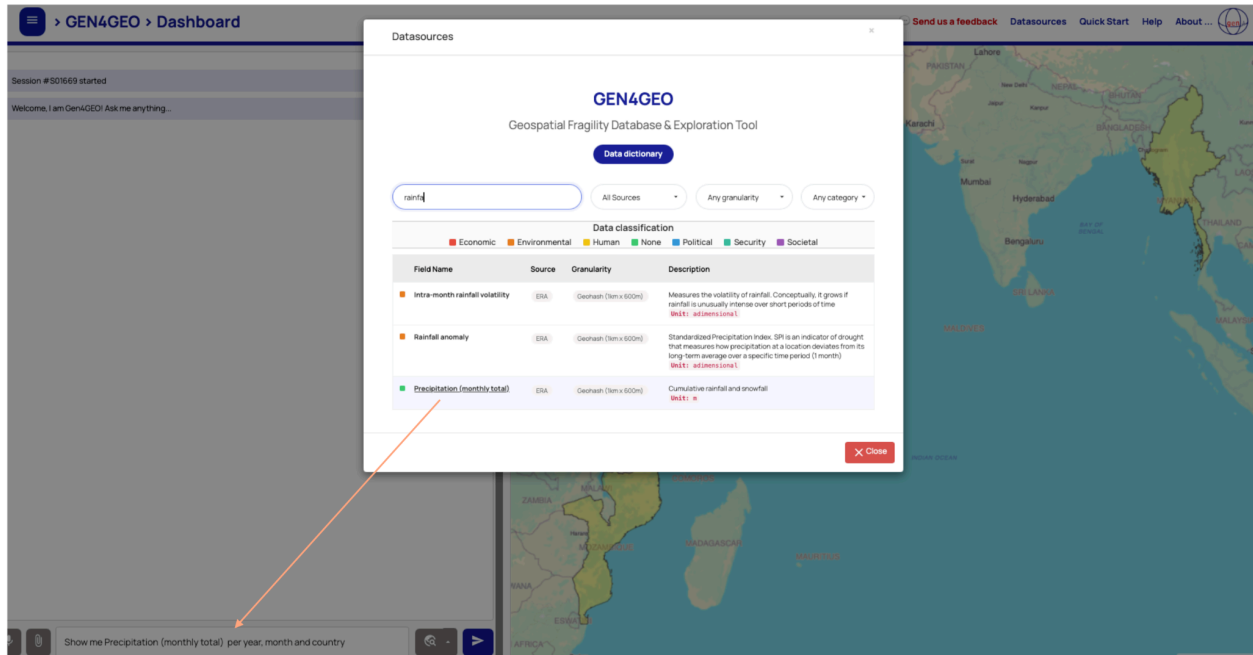


Figure 10 – Clickable indicators in the Datasources section.

3. Free vs. Admin navigation mode

The area of interest (AoI) can be selected by drawing a custom area on the map, as explained in Section 2.1, or by selecting predefined administrative areas, namely countries, regions within countries, or provinces within regions. These three levels of predefined administrative areas are called “Admin Level 0” (i.e. countries), “Admin Level 1” (i.e. regions), and “Admin Level 2” (i.e. provinces). You can click on the “Drawing mode” drop-down menu to select your navigation mode, as shown in Figure 11. By default, the drawing mode is set to “Free Draw.”

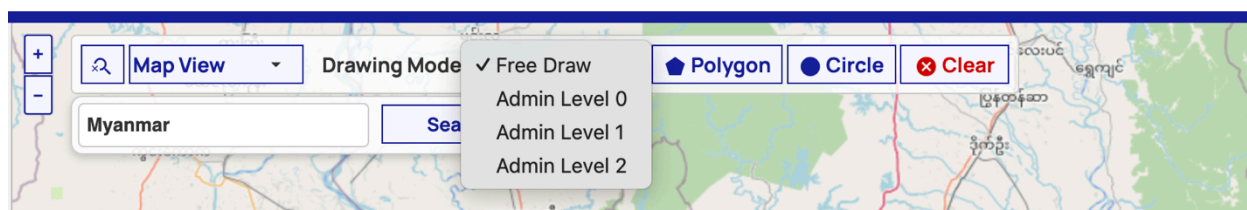


Figure 11 – How to select a navigation mode.

As an example, if you select “Admin Level 1” (i.e. regions) navigation mode, you will be able to draw a point, a line, a polygon, or a circle to select your regions of interest. If you click on the “Point” button, the administrative borders of regions will show automatically (see Figure 12) and you can click on one or more than one of them by keeping the “shift” key pressed on your keyboard until you have selected all regions of interest. If you make the wrong selection, you can click on the “Clear” button and choose again.

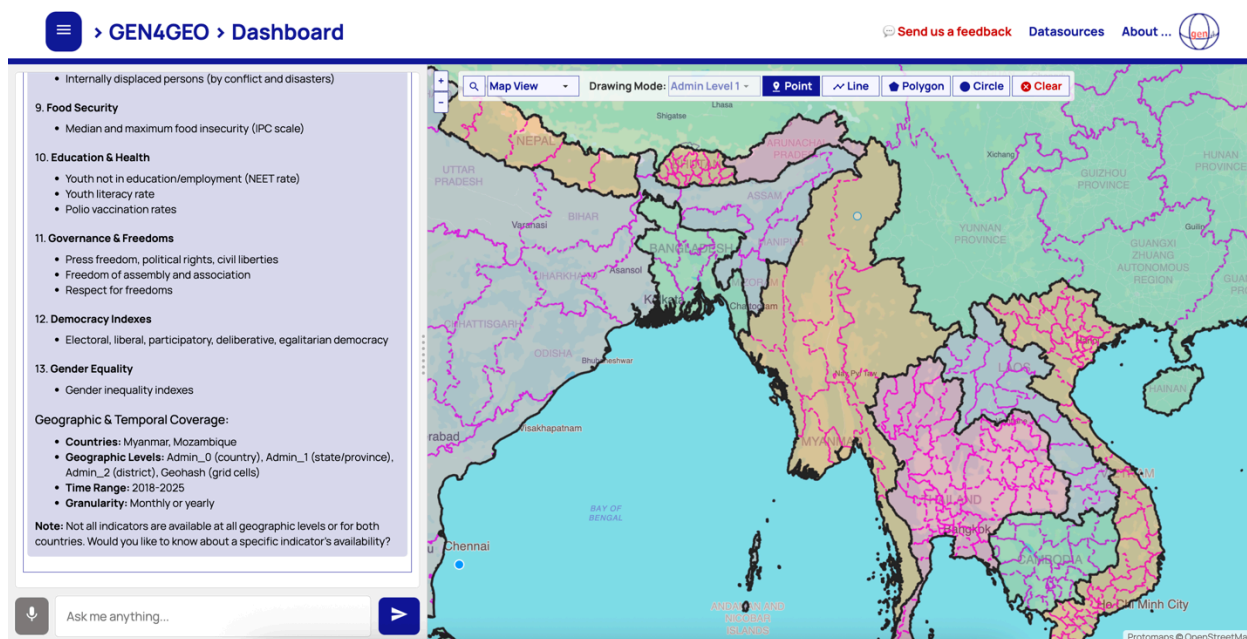


Figure 12 – Admin Level 1 navigation mode – example.

The “Admin Level 2” (i.e. provinces) and “Admin Level 0” (i.e. countries) navigation modes work in the same way. The only difference is the administrative boundaries that are shown on the

map. Figure 13 shows the “Admin Level 2” boundaries for Myanmar. Black borders indicate countries, black dashed borders indicate regions, and pink borders indicate provinces. The names of the provinces appear on the map when you hover the mouse over a province.

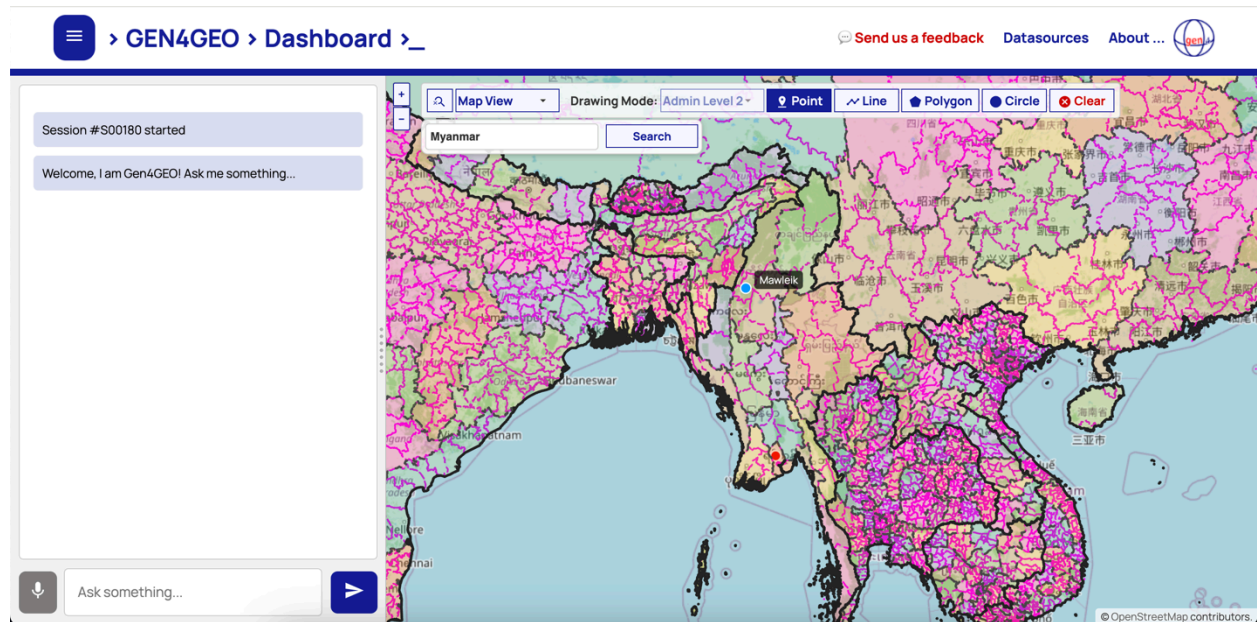


Figure 13 – Admin Level 2 navigation mode – example.

You can also use the key combination Ctrl+A (or cmd+A) to select:

- all regions within a country (Navigate at ADM0 level, select the country, Ctrl+A)
- all the provinces within the selected region(s) of a country (Navigate at ADM1 level, select the region(s), Ctrl+A))
- the countries which the selected provinces belong to (Navigate at ADM2 level, select the province(s), Ctrl+A)).

The Ctrl+A shortcut can be used multiple times consecutively and the selection will automatically change accordingly.

4. How GEN4GEO answers your questions

4.1. General structure of a GEN4GEO answer

When you ask a question through the prompt window, GEN4GEO can answer in two ways:

1. If the question is generic and cannot be answered based on the fragility indicators stored in the database, GEN4GEO will answer based on the general knowledge of the underlying large language model (LLM). For example, Figure 14 shows the answer to the question “In which country is Sagaing located?”.

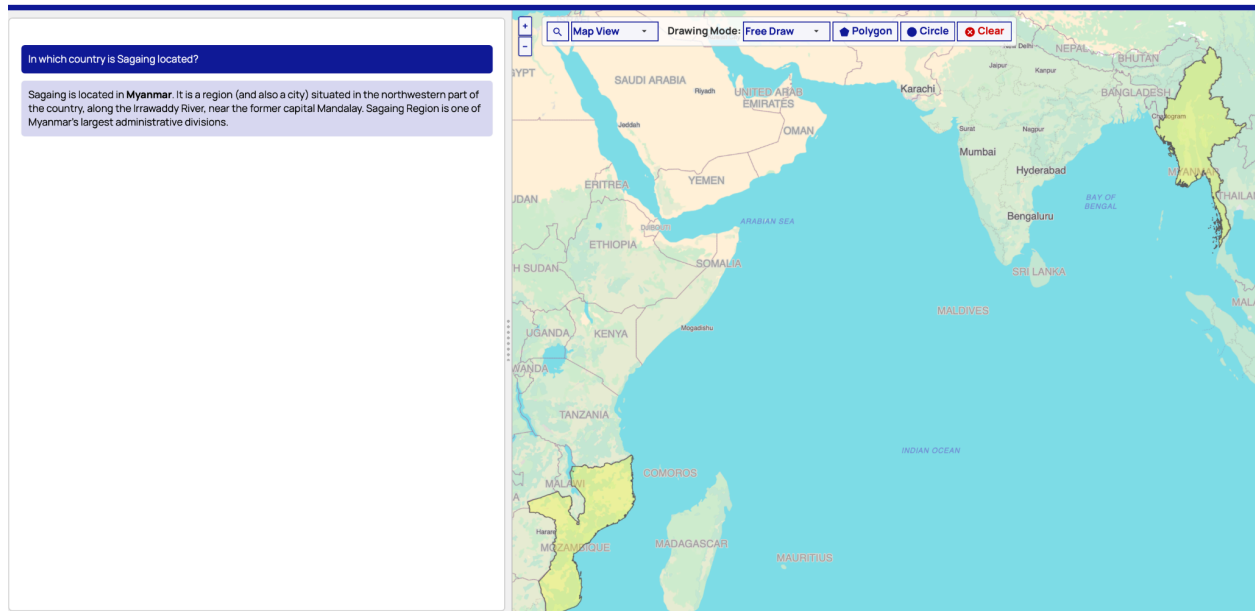


Figure 14 – Answer to a generic question with the landing page default area selection (i.e. a question that cannot be answered based on the fragility indicators stored in the database).

To be noticed that if the question doesn't need to interrogate the database because it involves general knowledge, the selected area of interest on the map becomes irrelevant for the question. The example in Figure 14 has been asked without changing the area selection in the landing page, while the one in Figure 15 has been asked by selecting a province in Mozambique. The answer given by the LLM is pretty the same.

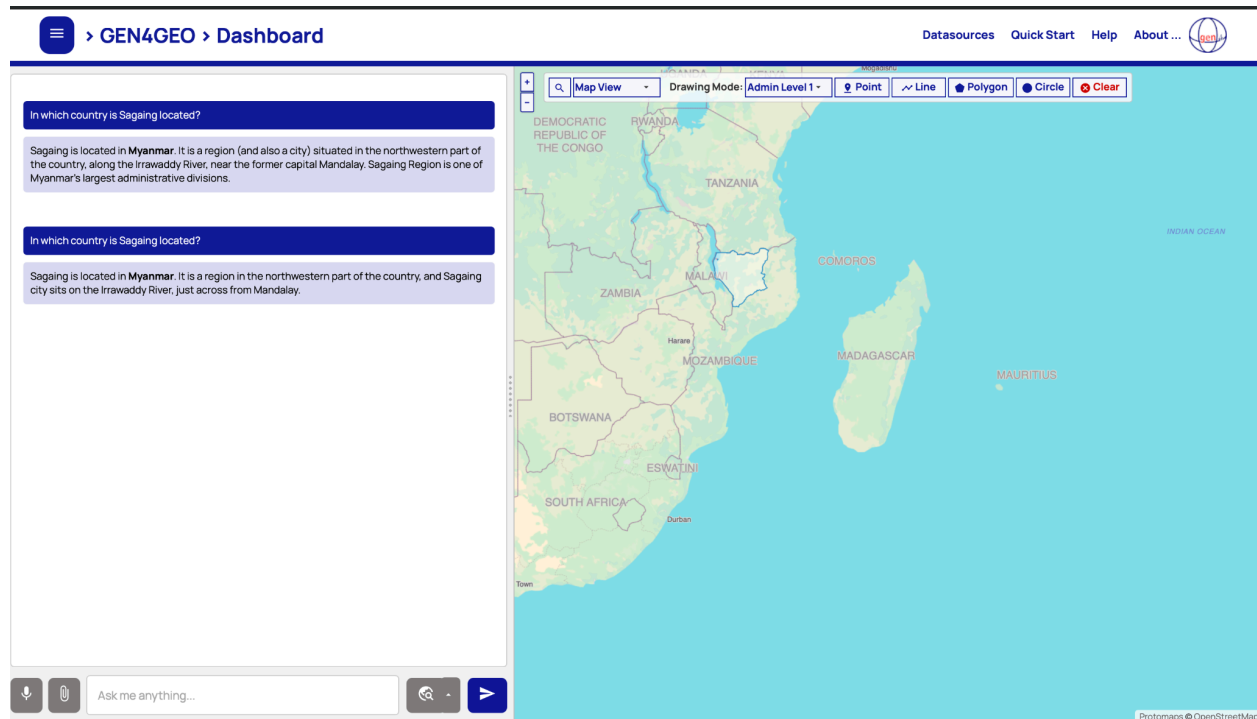


Figure 15 – Answer to a generic question by changing the default area selection (i.e. a question that cannot be answered based on the fragility indicators stored in the database).

2. If the question can be answered based on the fragility indicators stored in the database, GEN4GEO will retrieve the indicators that can help answer the question and will provide the answer in four different formats:
 - a. An AI-generated text comment.
 - b. A chart displaying the raw time series of the indicators across the entire period covered by the data in the database.
 - c. A table showing the indicators aggregated as requested by your question.
 - d. A map visually representing the selected indicators (raw or aggregated)

For example, let us consider the following question: “Can you give me the average population in 2025 for the selected regions?” The answer is shown in Figure 16. As you can see, the answer includes the four components listed above, that is a comment, a chart, a table, and a map.

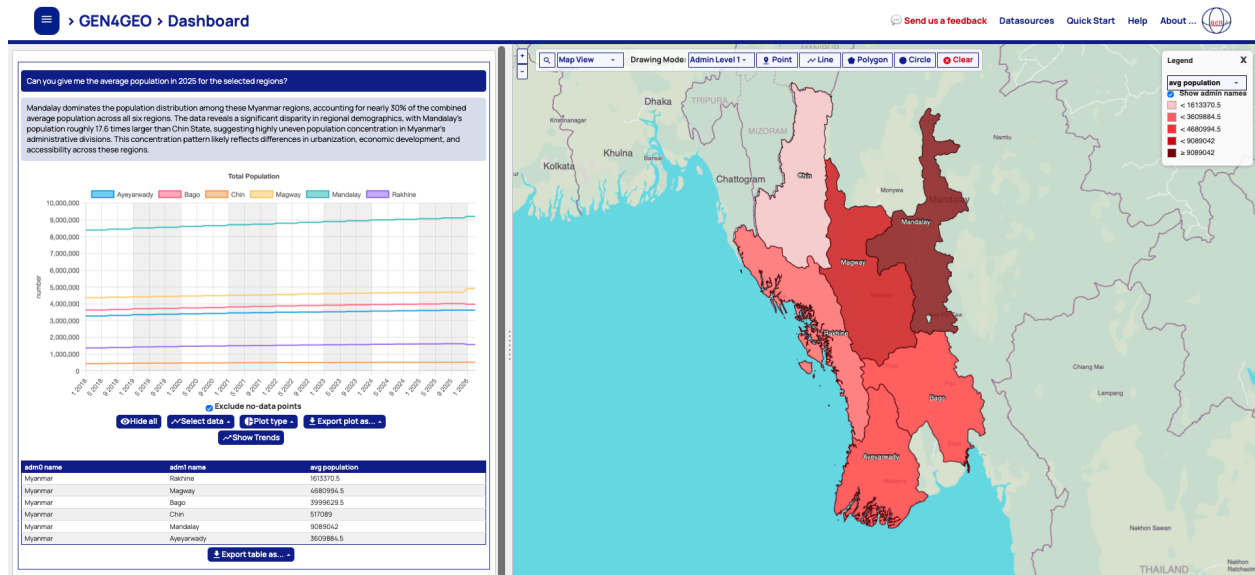


Figure 16 – Answer to the question: “Can you give the average population in 2025 of the selected regions?”

4.2. How to customize a GEN4GEO answer

How to customize maps

The maps include a “Period” button, which allows users to change the map's time reference. By default, the map displays the most recent available time period.

In Free Draw mode, the map always displays raw monthly data, as shown in Figure 17. Users can therefore select both the year and the month using the Period selector.

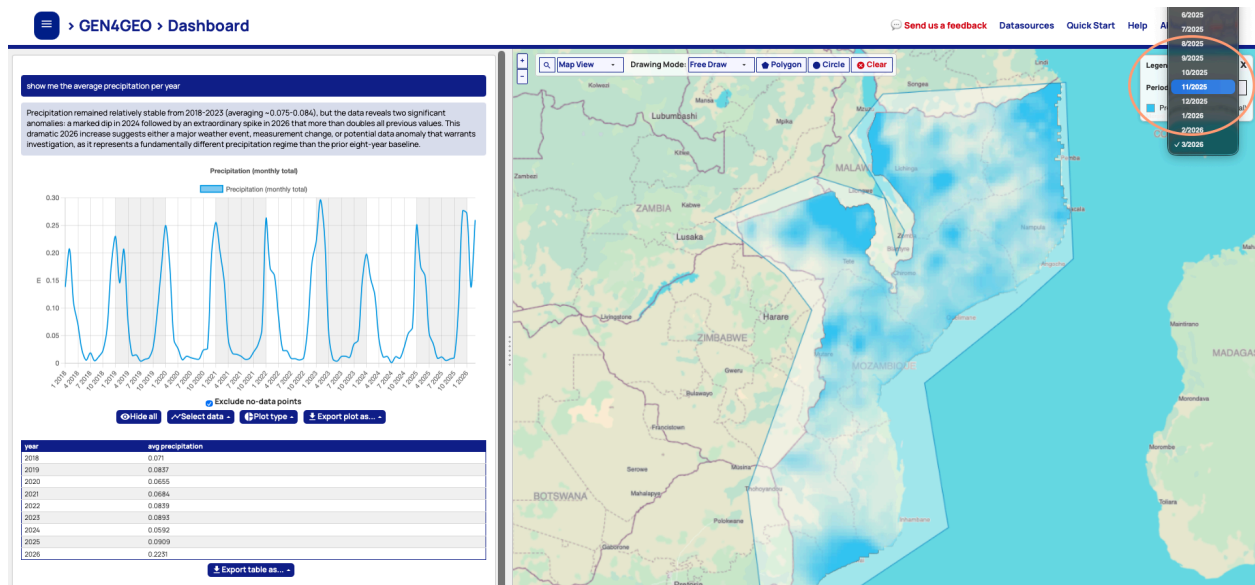


Figure 17 – How to change the time frame of a monthly map in Free Draw mode.

In Admin mode, the map reflects the content of the table (for example, data aggregated per year or data filtered for a specific month) as shown in Figure 18. The time reference is automatically

Menu
GEN4GEO Dashboard
Send a report feedback Datasources Quick Start Help About

Send me the average rainfall volatility per year and province

Rainfall volatility in Mozambique exhibits a clear geographical gradient, with northern and central provinces (particularly Tete at 1.38 average, Nampula at 1.27, and CaboDelgado at 1.21) experiencing substantially higher volatility than southern provinces (Maputo and MaputoCity averaging ~0.95), suggesting distinct climatic instability patterns across regions. A notable volatility spike occurs in 2022-2024 across most provinces, with 2022 showing peak readings in CaboDelgado (1.39), Gaza (0.92 outlier), and Nampula (1.43), indicating a region-wide weather pattern disruption during that period. Gaza province displays the most extreme projections, with 2026 volatility reaching 1.90—the highest in the entire dataset—suggesting either accelerating climatic variability or a significant forecasting anomaly for that region in that year.

Intra-month rainfall volatility

Exclude no-data points

Hide all
Select data
Plot type
Export plot as...

Show Trends

admin name	admin name &	year	avg rainfall volatility
Mozambique	CaboDelgado	2008	1.0624
Mozambique	CaboDelgado	2005	1.0085
Mozambique	CaboDelgado	2004	1.3635
Mozambique	CaboDelgado	2003	1.1707
Mozambique	CaboDelgado	2002	1.3898
Mozambique	CaboDelgado	2001	1.2254
Mozambique	CaboDelgado	2000	1.2656
Mozambique	CaboDelgado	2019	1.0827
Mozambique	CaboDelgado	2018	1.1356
Mozambique	CaboDelgado	2006	1.1901
Mozambique	Gaza	2025	1.2895

If the answer to your question includes multiple indicators, you can also select the indicator to be represented on the map, using the drop-down menu shown in Figure 19. The question answered in Figure 19 is “Can you give me the average population and total mentions of racism in 2024 for the selected regions?”. The answer includes the “population” and “mentions racism” indicators, accordingly.

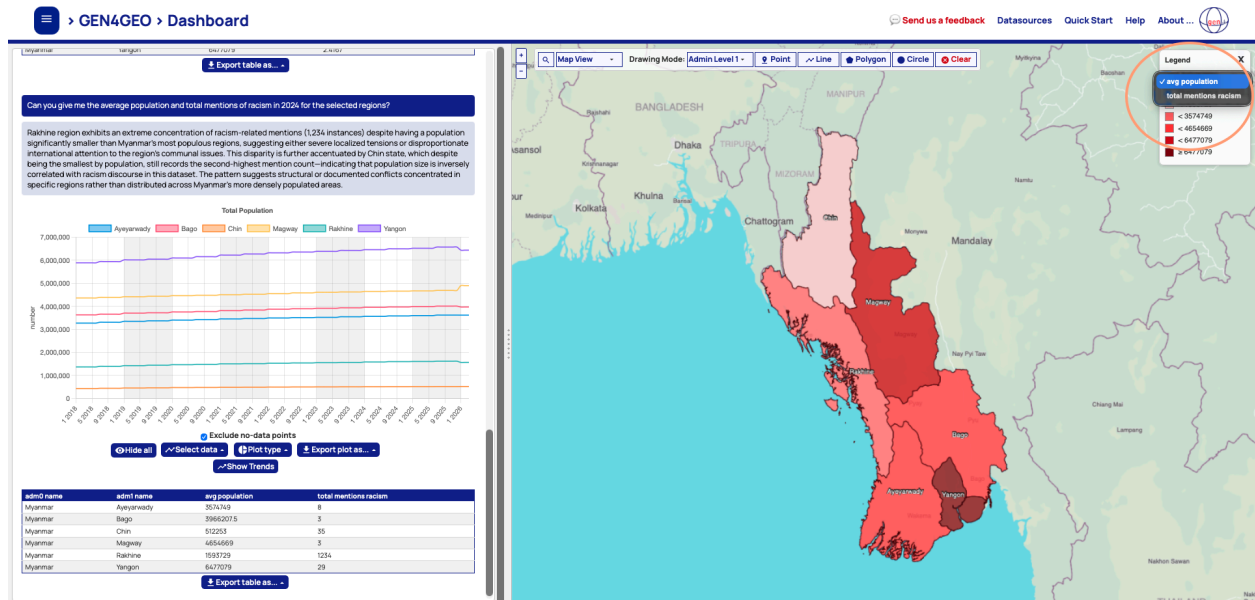


Figure 19 – How to change the indicator represented on the map.

You can also hide the names of the admins on the map by deflagging the option 'Show admin names' as shown in Figure 20.

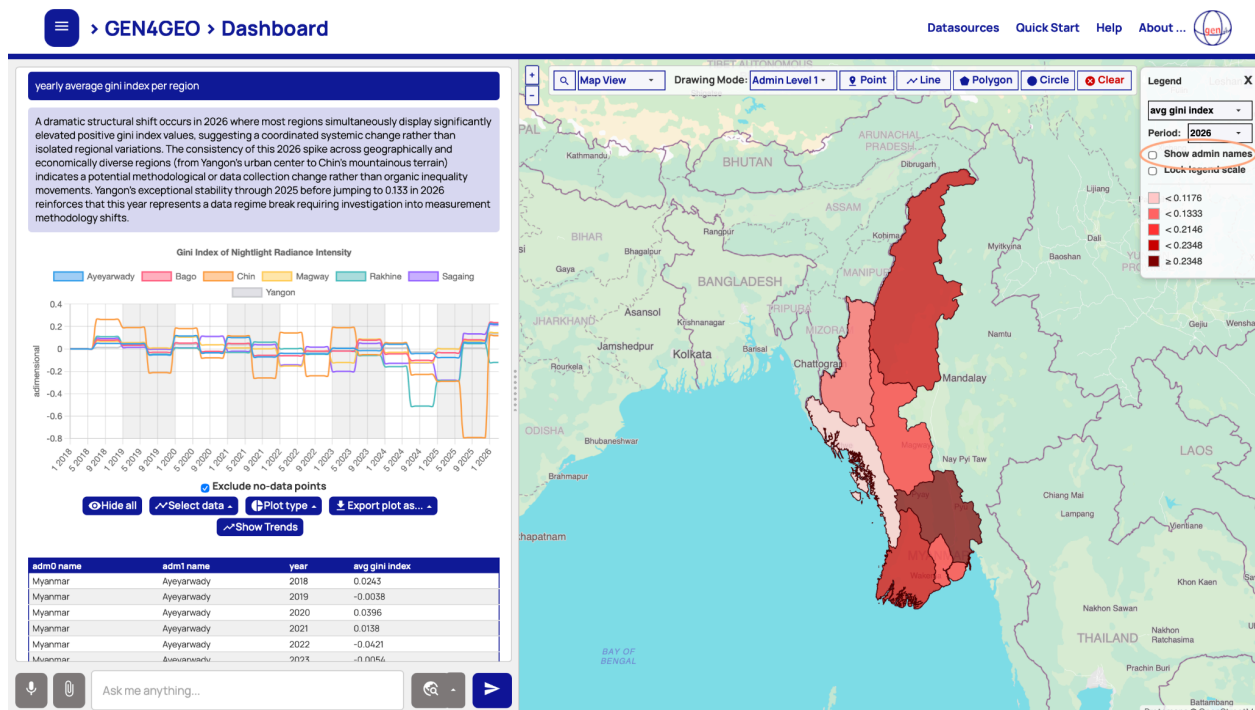


Figure 20 – How to hide the names of the admins in a map.

By flagging the option ‘Lock legend scale’ as shown in figure 21, you can also ‘freeze’ the thresholds of an indicator of the selected time frame. This option allows to produce comparable maps of the same indicator across time when customizing the time period of the maps.

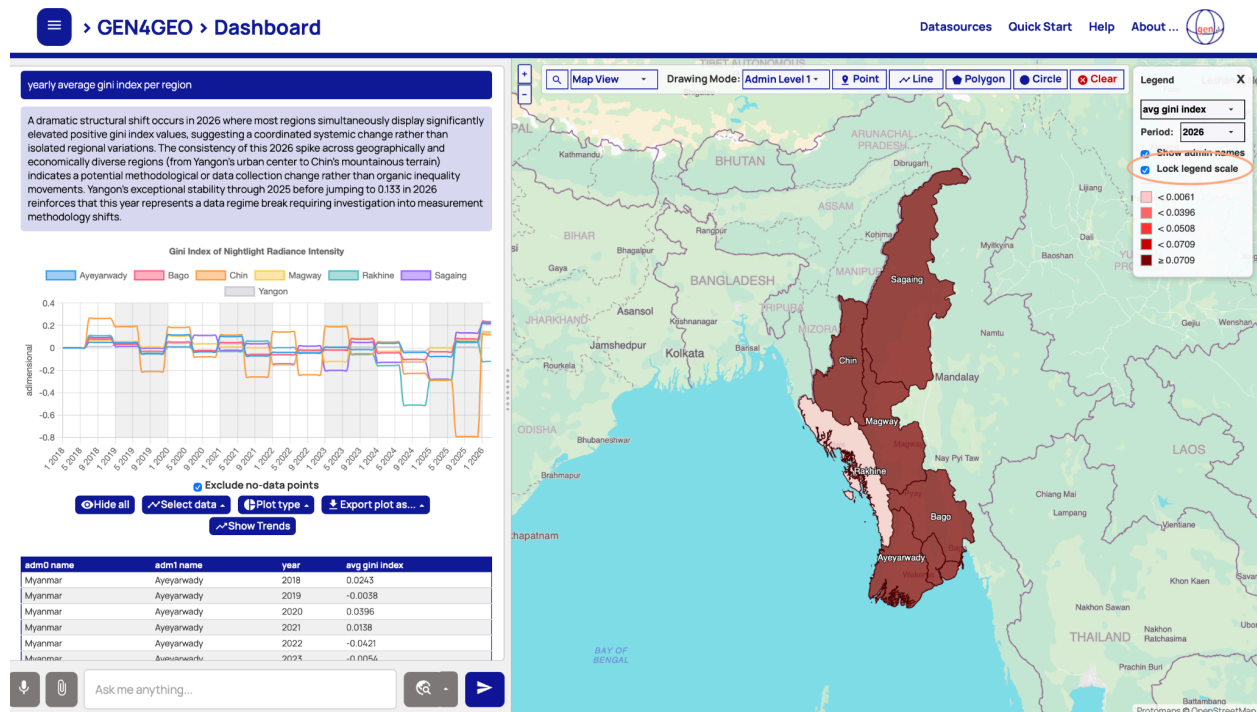


Figure 21 – How to lock the thresholds of an indicator in a map

If you are navigating in “Free Draw” mode, all indicators are represented on the same map. In this case, you can hide one or multiple indicators by clicking on the name of the indicator in the legend.

Figure 22 shows how the population and conflicts indicators are both represented on the map, answering the question “Can you give me the average population and total conflicts Uppsala in 2025 for the selected area?”.

Figure 23 shows the same map in Figure 22 with conflicts deselected.

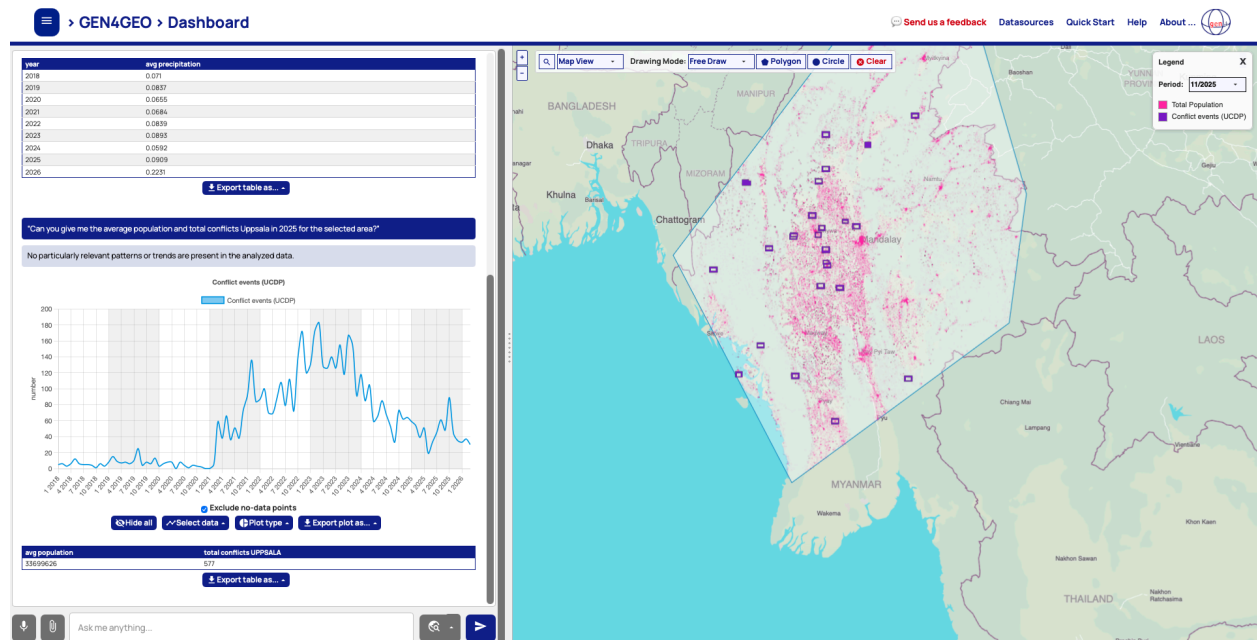


Figure 22 – Using “Free Draw” navigation mode to see multiple indicators on the same map.

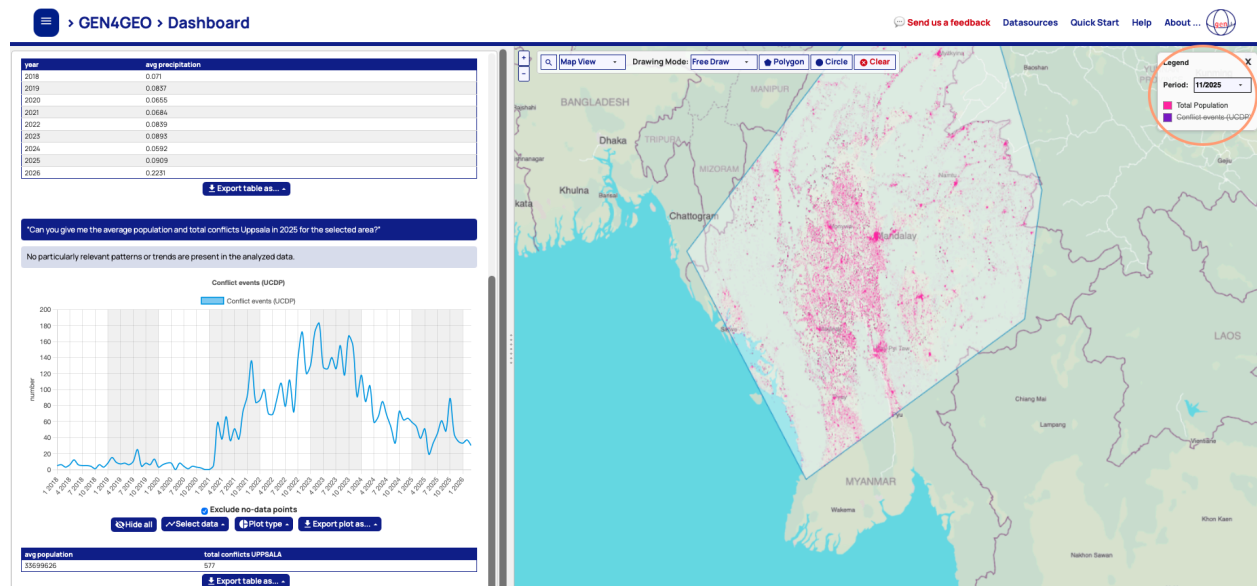


Figure 23 – How to deselect an indicator from the maps in “Free Draw”.

How to customize charts

Charts can be customized by:

1. Selecting the indicator that is shown in the chart using the “Select data” menu below the chart (Figure 24).

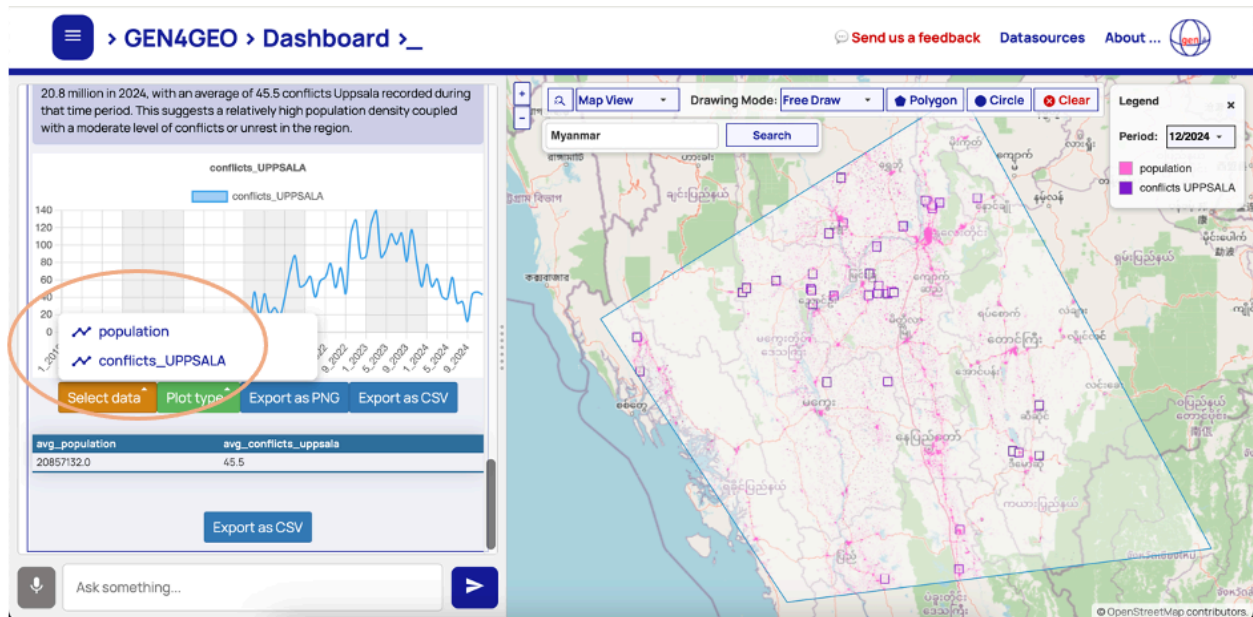


Figure 24 – How to change the indicator that is shown in the chart.

2. Changing the plot type using the “Plot type” selector below the chart (Figure 25).

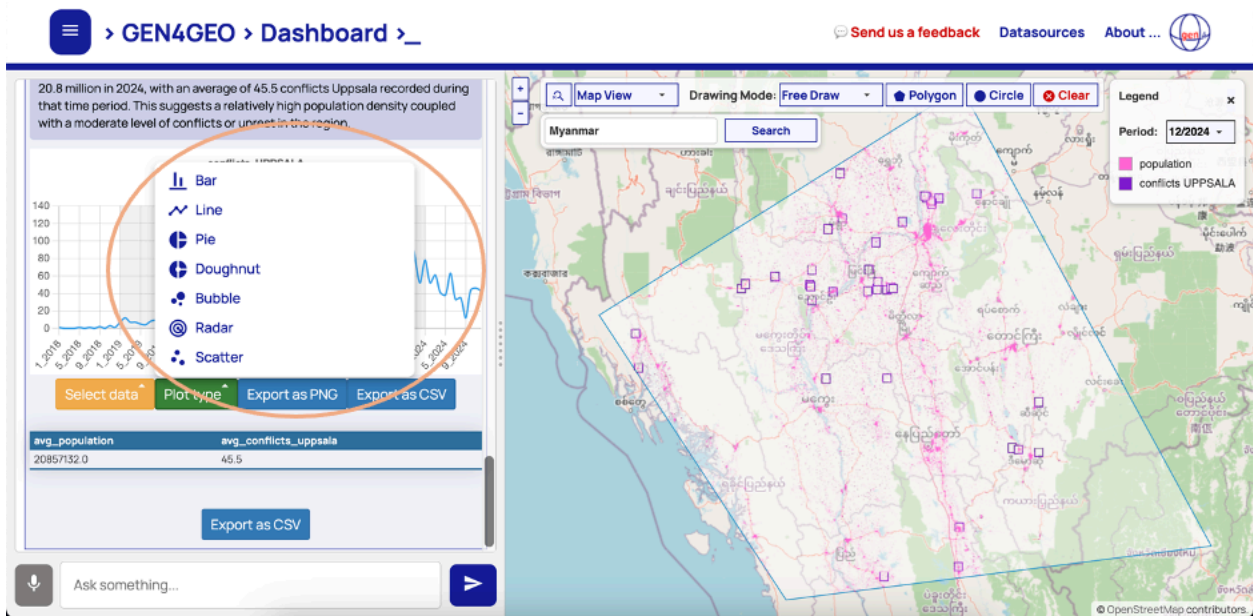


Figure 25 – How to change the plot type of the chart.

3. Selecting and deselecting countries, regions, or provinces by clicking on their names right above the chart (Figure 26). In this case, Figure 19 shows the answer to the question “Can you give me the average population and average mentions of elections in 2024 for the selected regions?”.

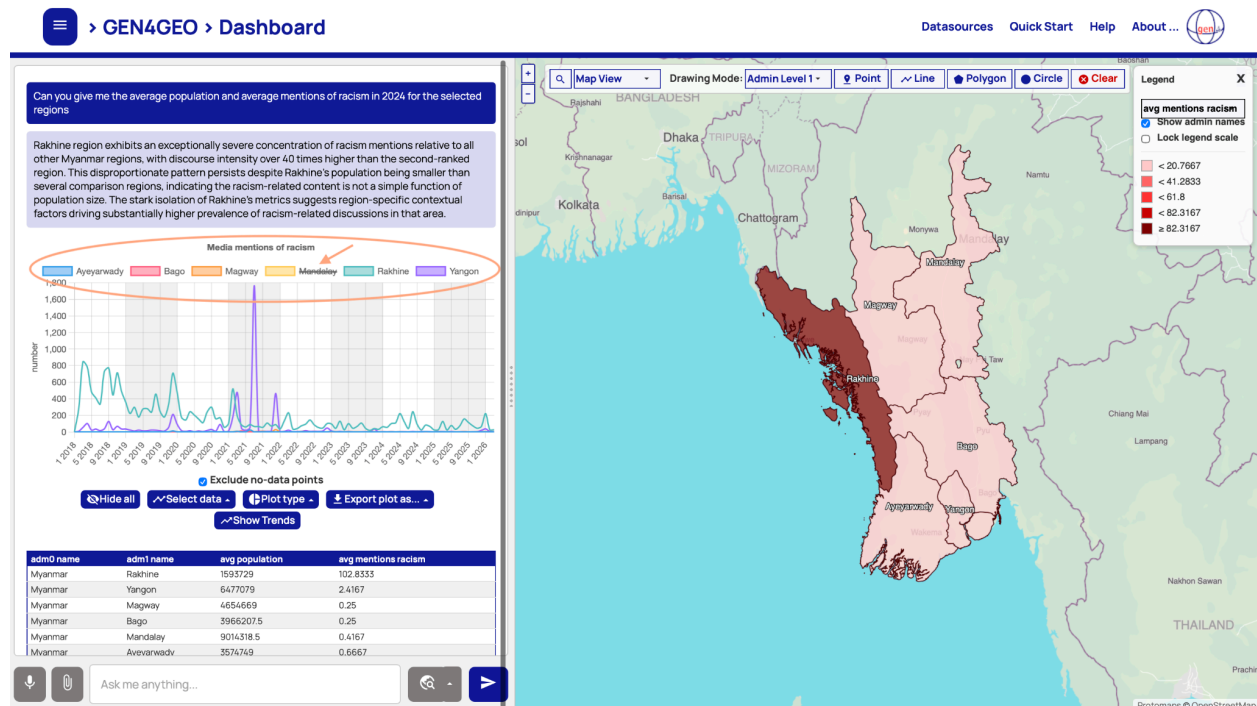


Figure 26 – How to select/deselect time series in the chart.

4. Selecting and deselecting all countries, regions, or provinces by clicking on the “Hide all”/“Show all” button right below the chart (Figure 27). In this case, Figure 27 shows the answer to the question “Can you give me the average population and total mentions of racism in 2025 for the selected regions?” for the Aywyarady, Bago, Chin, Magway, Mandalay, and Rakhine regions of Myanmar.

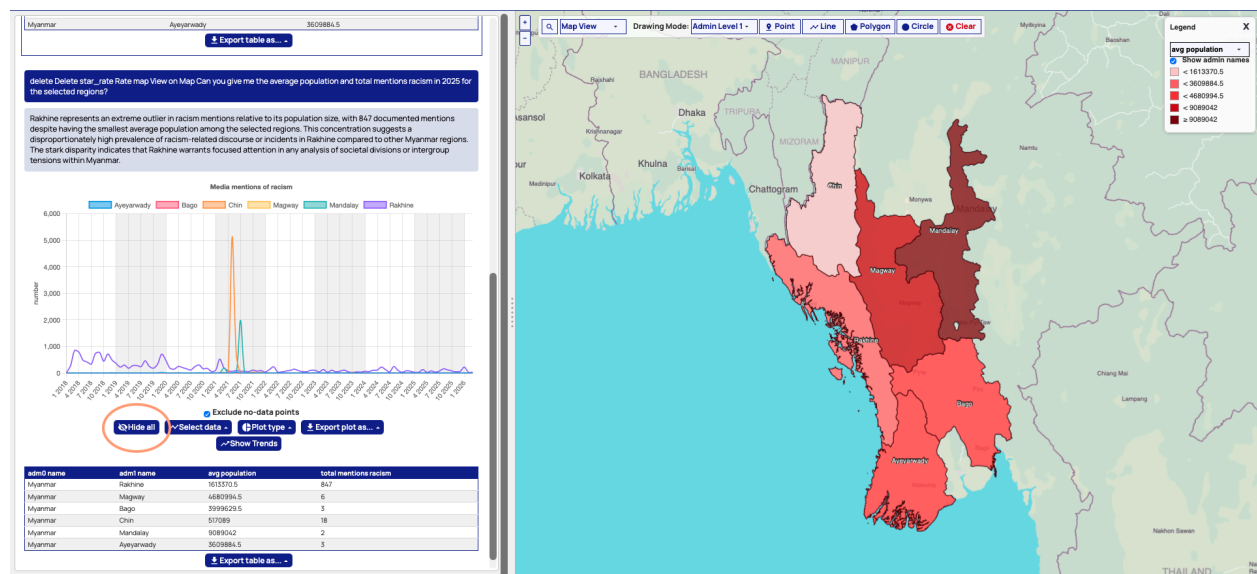


Figure 27 – How to select/deselect time series in the chart all at once.

5. Selecting a custom temporal range: The plot supports interactive navigation along the temporal axis to allow precise selection of time intervals.
 - a. **Select a specific time interval:** Click-and-drag over the plot area to select a custom temporal interval. The selected range is highlighted with a darker grey background.
 - b. **Pan in time:** Hold the ALT/Option key and Click and drag the plot to move backward or forward in time while maintaining the current zoom level.
 - c. **Reset the view:** To return to the default temporal extent, click the 'Reset' button located in the top-right corner of the plot. The button appears automatically when the mouse hovers over and the default zoom has changed.

How to customize tables

Tables can be customized by sorting the data in ascending or descending order based on one or multiple selected columns, as shown in Figure 28. In this case, Figure 28 shows the answer to the question “Can you give me the population and mentions of elections in 2024 for the selected regions? Specify the month and the region.” for the Magway, Mandalay, and Rakhine regions of Myanmar. The data in the table are sorted by population in descending order.

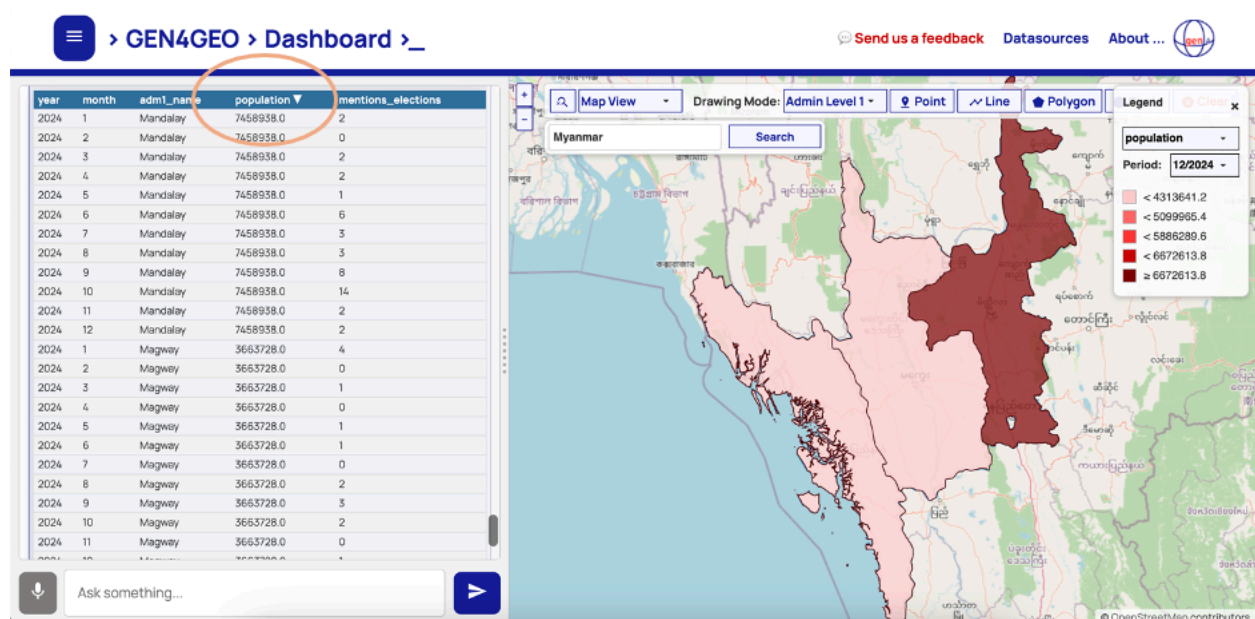


Figure 28 – Ordering data in the table.

How to customize AI-generated text comments

Text comments can be customized only by asking the same question again by specifying the changes that you would like to see in the comment. Figure 29 shows the answer to the question “Can you give me the population and mentions of elections in 2024 for the selected regions? Specify

the month and the region. Give me a super short comment.” for the Magway, Mandalay, and Rakhine regions of Myanmar.

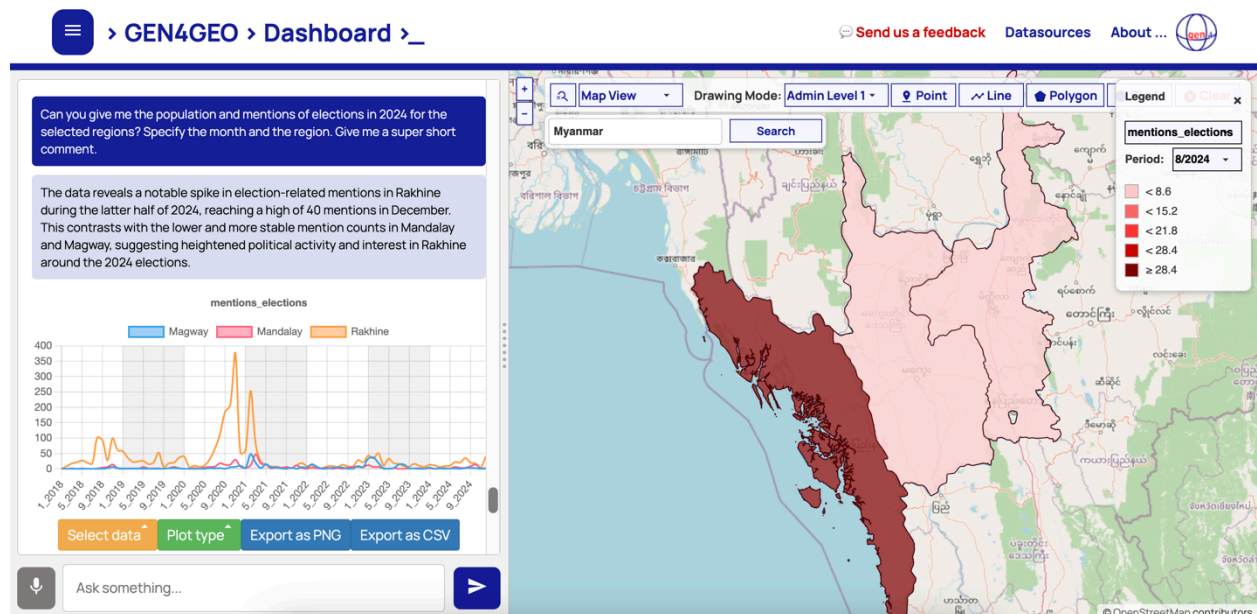


Figure 29 – How to customize AI-generated text comments.

5. How to create a report

5.1. How to remove content

Any content generated in the chat, including text and screenshots of the maps, can be deleted if needed. To remove an item, select it and then click the “Delete” button located in the top-right corner of the item, see Figure 30. The item will be permanently removed.

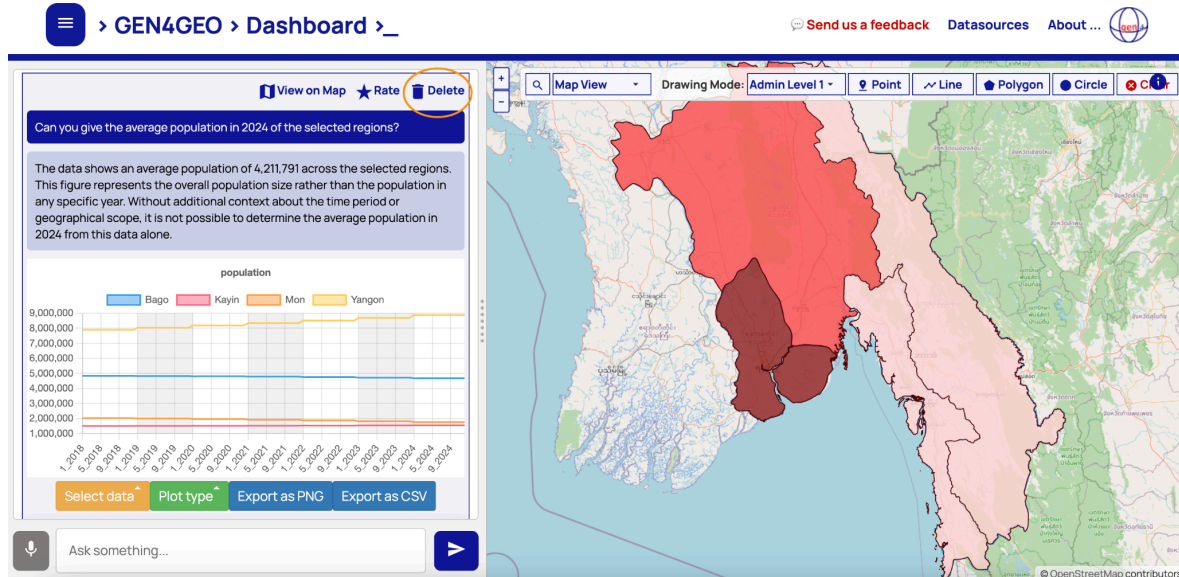


Figure 30 – How to delete an answer.

5.2. How to generate and save a report

Click the three horizontal lines (≡) in the top-left corner of the page to open the main menu, as shown in Figure 31.

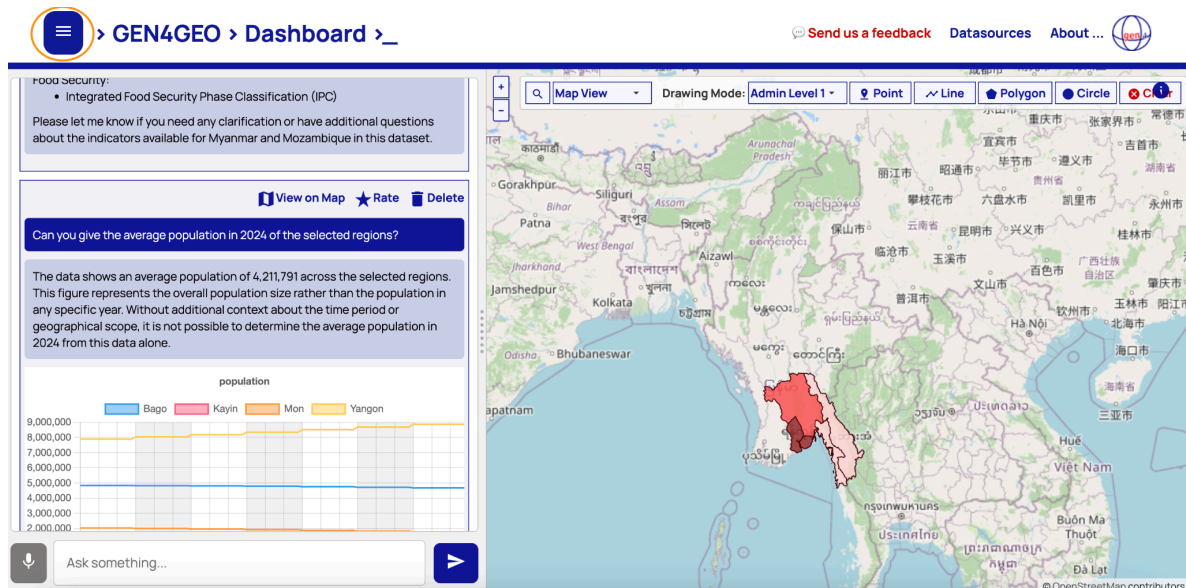


Figure 31 – How to open the main menu.

Before creating a report, you can include the map currently visualized. To do this, click the “Add a map screenshot” button, as shown in Figure 32. A screenshot of the latest chat answer will be created.

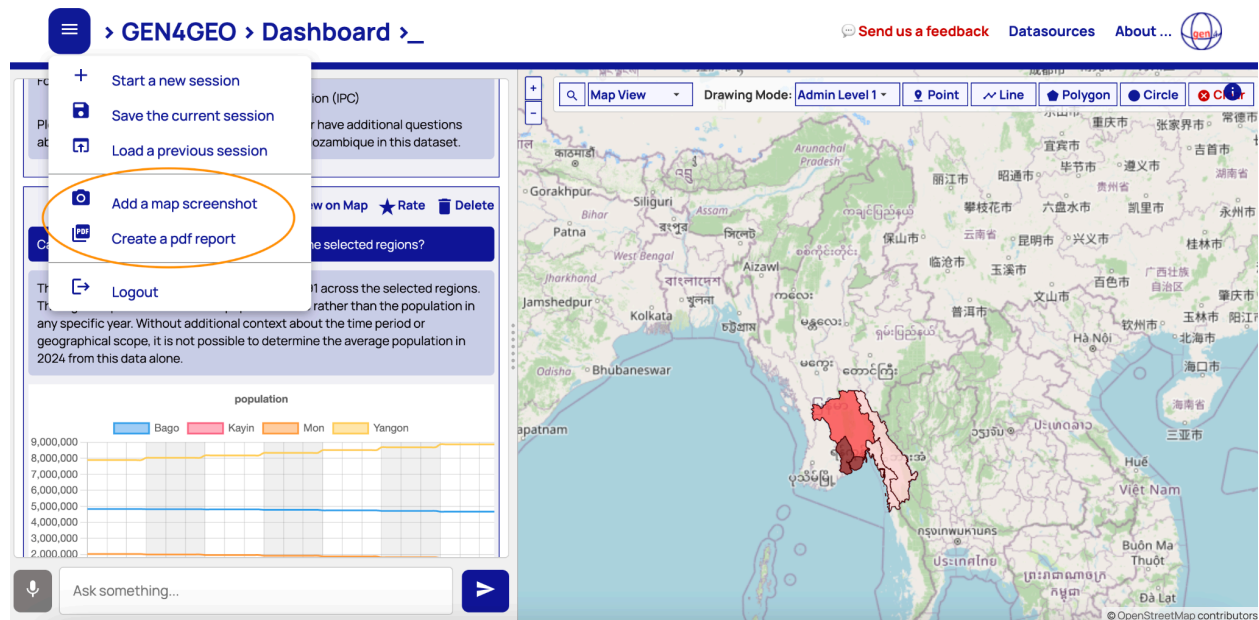


Figure 32 – How to create a report including a map.

If you want to take a screenshot of the map from a previous answer, click on the question and then on the ‘View on Map’ button that pops up (Figure 33), visualize the map and add the screenshot as explained before.

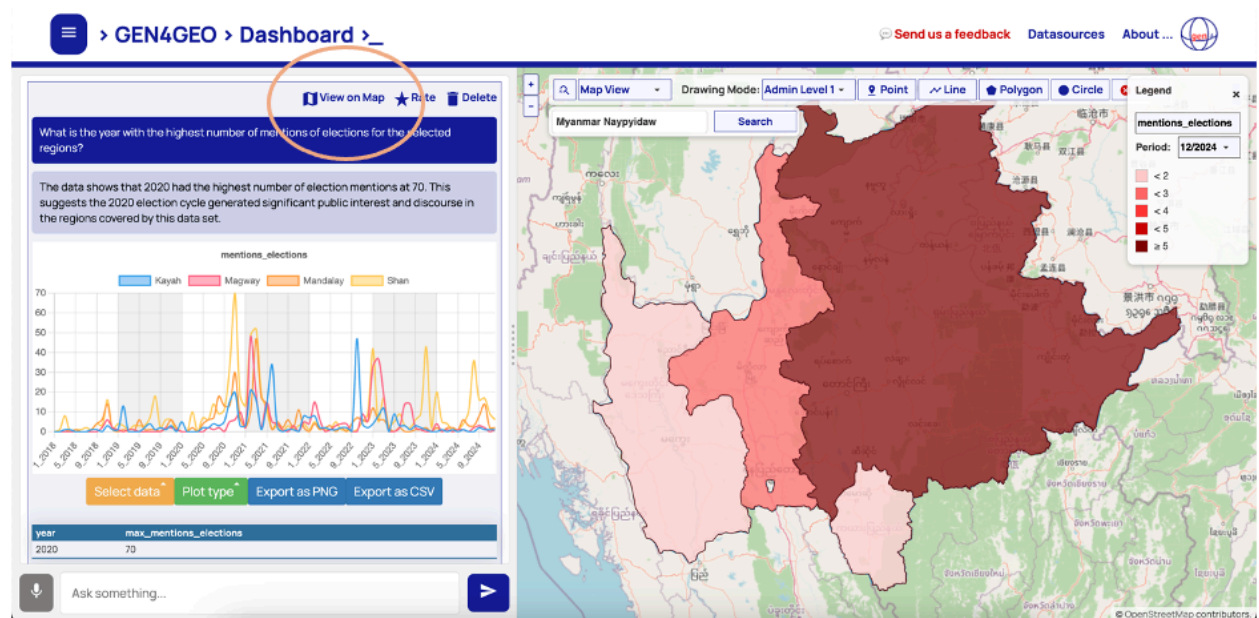


Figure 33 – How to visualize a map from a previous answer.

Click the “Create a pdf report” button to generate a report containing all the questions and answers from your GEN4GEO chat, along with any attached maps, as shown in Figure 32.

5.3. How to export data

Users can export all charts, tables, and maps produced by GEN4GEO.

To download charts, go to the answer section below the chart and click “Export plot as...”, as shown in Figure 34. You will be able to choose among different export formats, including .csv, .xlsx, .png.

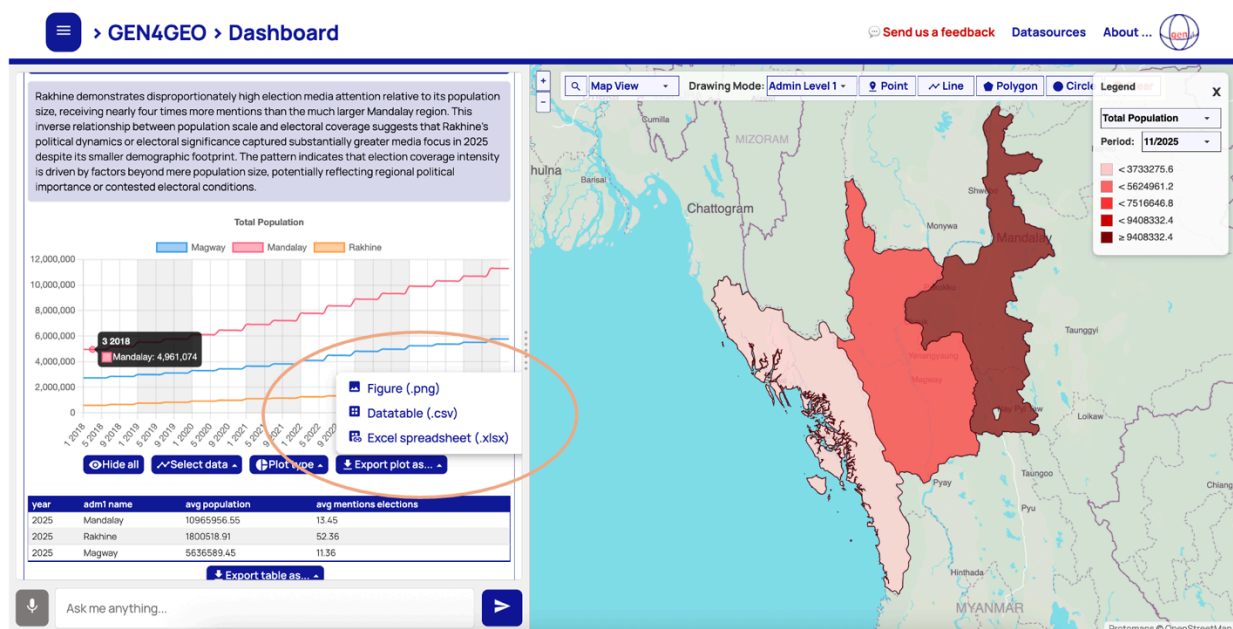


Figure 34 – How to export charts.

To download tables, go to the answer section below the table and click “Export table as...”, as shown in Figure 35. You will be able to choose among different export formats, including .csv, .xlsx, .pdf.

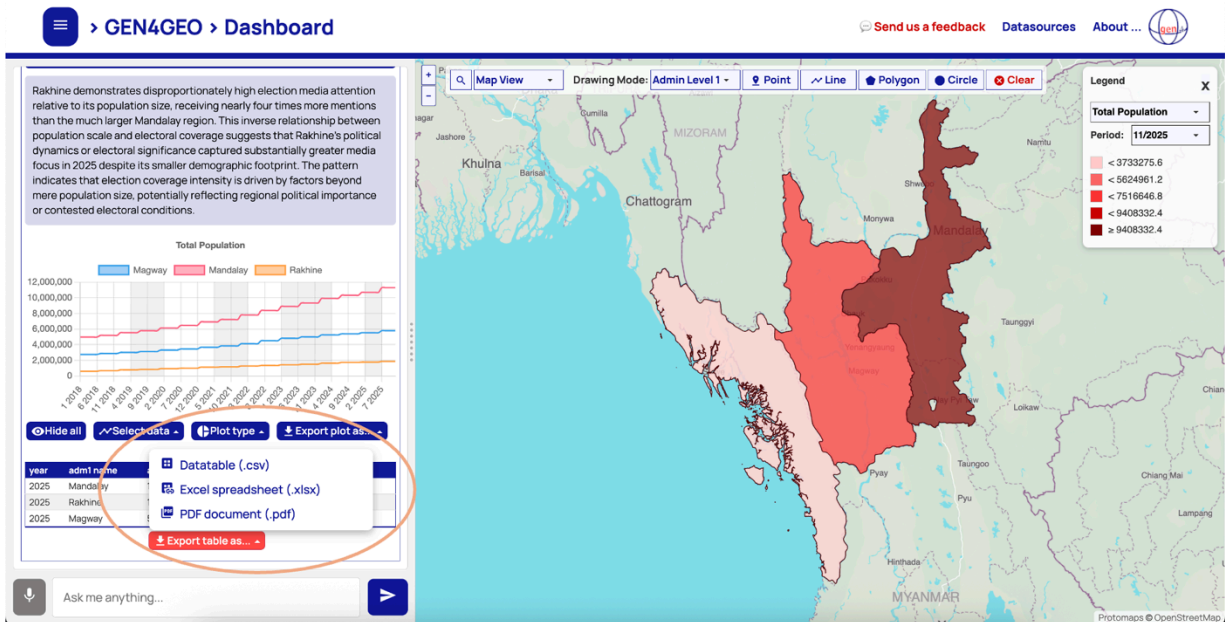


Figure 35 – How to export tables.

To download maps, click “Add a map screenshot”, as shown in Figure 32. Then, in the answer section below the newly generated image, click “Export as image”, as shown in Figure 36.

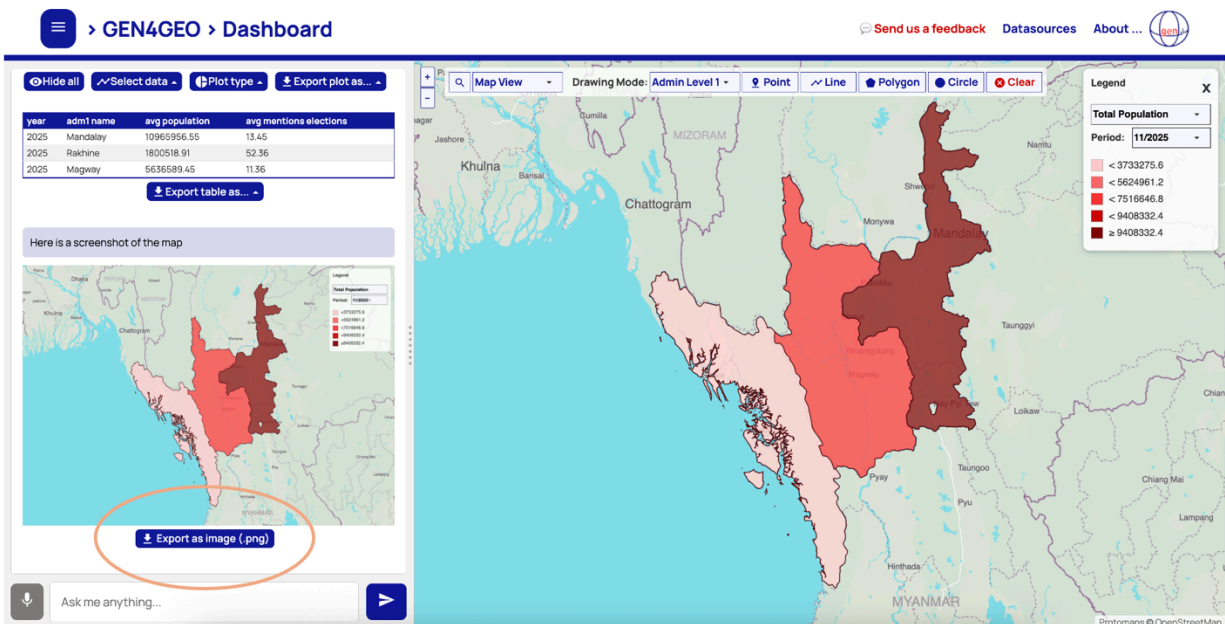


Figure 36 – How to export maps.

5.4. How to save and restore a session

To manage sessions in GEN4GEO, click on the main menu (the three horizontal lines (≡)) in the top-left corner of the page) and then use the buttons shown in Figure 37.

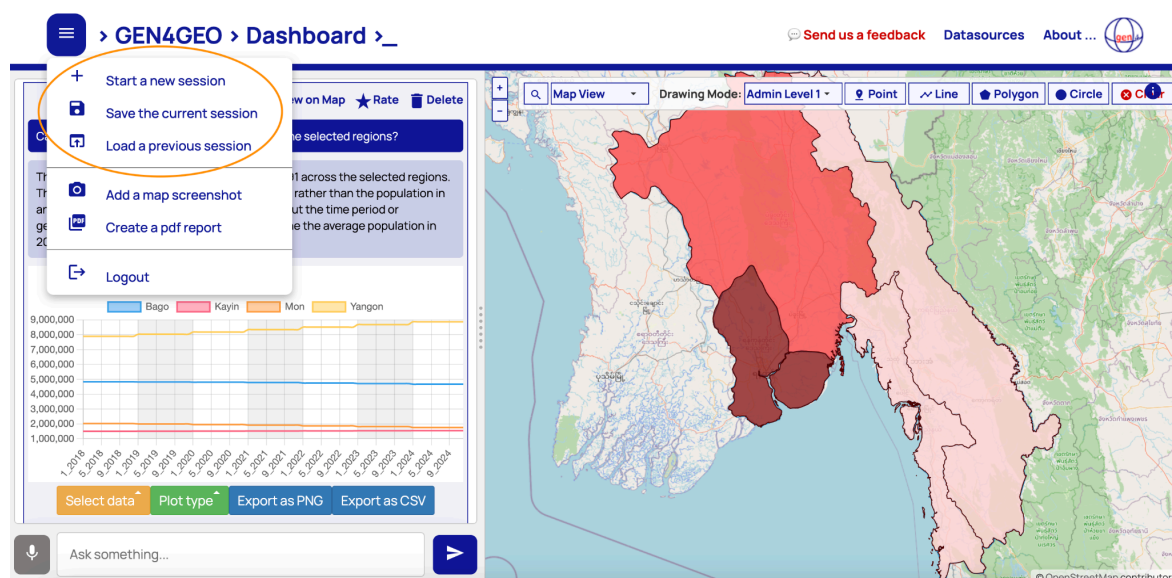


Figure 37 – How to start, save and load sessions.

The “Start a new session” button deletes the current session and starts a new session. All interactions with GEN4GEO from the current session will be permanently deleted, unless they are explicitly saved before starting a new session. The “Save current session” button allows you to save the current session by storing the chat history as a `.json` file on your PC. The “Load previous session” button allows you to select a previously saved `.json` file to restore a past session.

After restoring a previous session, you can visualize the map corresponding to any of your past questions by clicking on the question and then on the “View on Map” button that appears in the menu right above the question, as shown in Figure 33.

6. How to write your prompt

6.1. How to ask questions

GEN4GEO uses a large language model (llm) to interpret your questions. You do not need to be precise in the way you ask your questions, as the llm can understand your questions and select the indicators that best answer them. For example, you do not need to use the exact name of fragility indicators to extract information on those indicators. You can also make typing errors and the llm will correct them automatically. For example, you can ask “What is *forest* extent in the selected area?” or “What is *frest* extent in the selected area?” and obtain the same answer, as shown in Figure 38. In this case, you are not using the exact name of the indicator (which would be “forest_extent”) and you are misspelling the word forest at the same time, but the llm answers your question correctly.

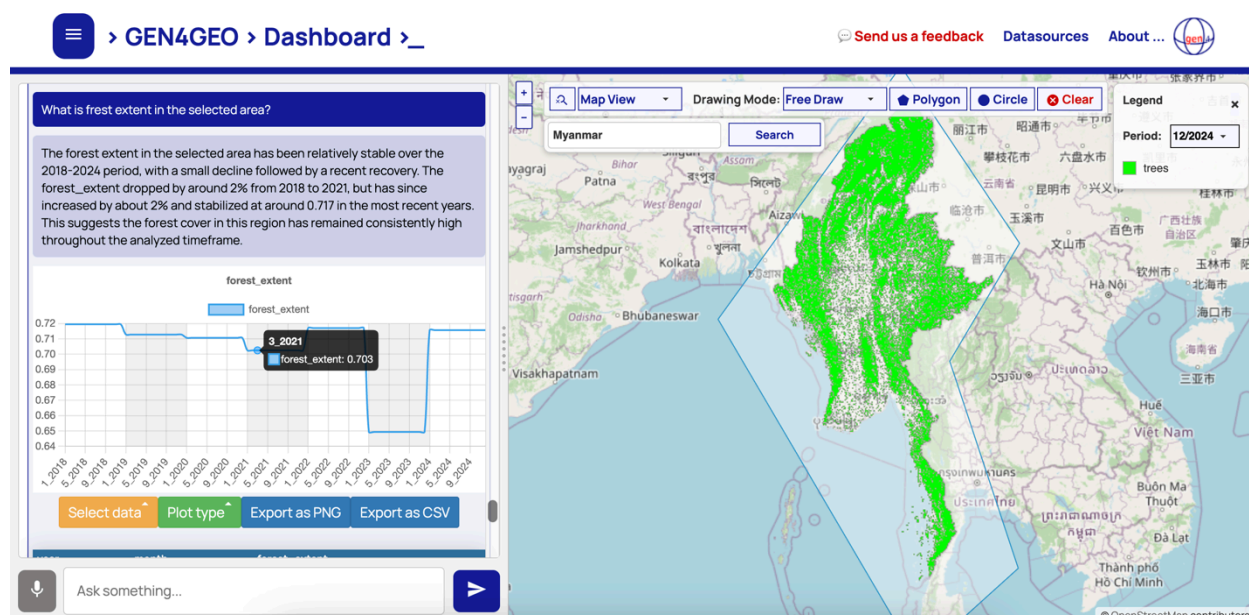


Figure 38 – GEN4GEO can understand questions with typos.

Similarly, you can use generic or collective names to extract multiple indicators at a time. For example, you can ask “Can you give me total mentions by topic?” and the dashboard will return multiple indicators of mentions, as shown in Figure 39.

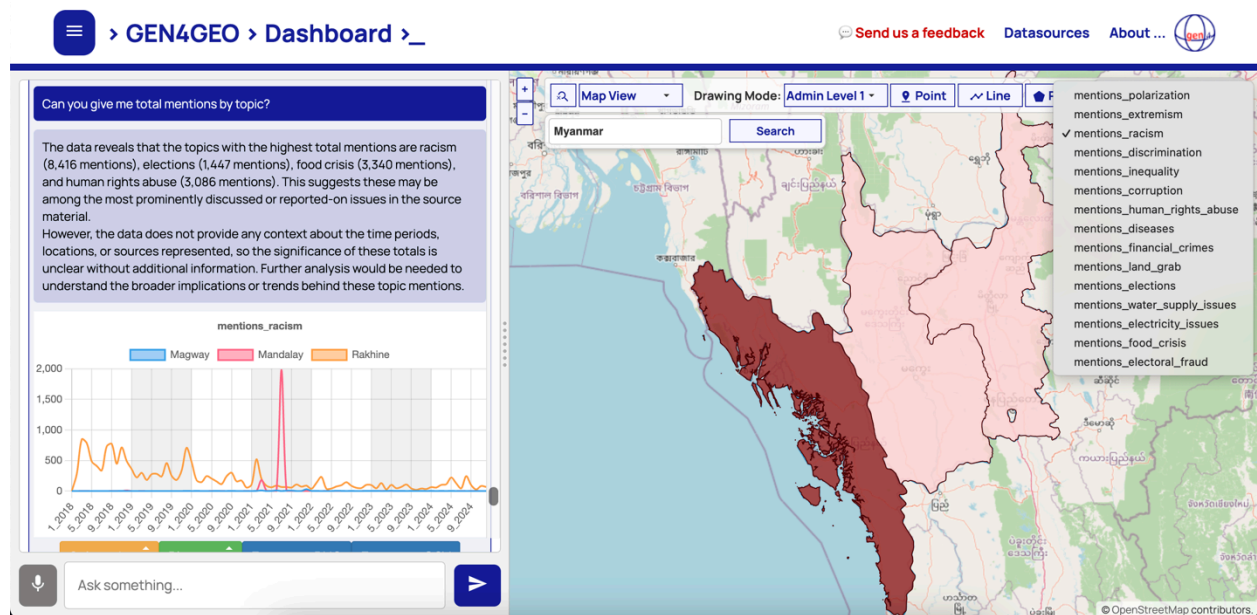


Figure 39 – Answer to the question “Can you give me total mentions by topic?”

However, even if the answer is correct, it may not be complete. In the previous example, you cannot be sure that the answer includes *all* indicators of mentions in the database. You can verify this by clicking on the “Datasources” button in the top menu providing the complete list of indicators. If you want to make sure that the answer includes all the indicators that you need, you should list them one by one in your question, as shown in Figure 40. The question is “Sum by year for each of the following indicators: Protests and Riots, Non-State Actor Events, Criminal Org Events, Political Actor Events.” The question lists 4 indicators, by their name, and GEN4GEO shows the 4 requested indicators. The question also specifies “sum by year”. This results in a table providing totals for all available years (2018-2025).

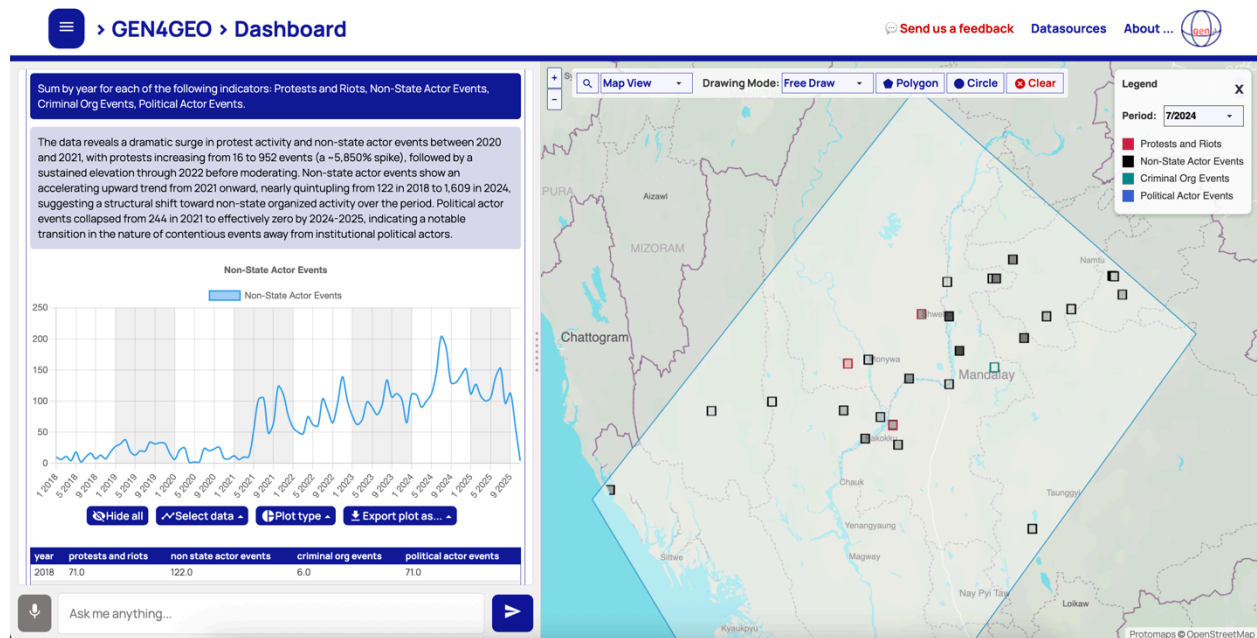


Figure 40 – How to ask a precise question.

6.2 How to ask for data aggregation

By asking specific questions, you can aggregate data in different ways, along the geographical and time dimensions. For example, you can ask “Can you give me the total number of Non-State Actor Events in the entire period?” and, in this way, obtain the total number across the entire 2018-2025 period, as shown in Figure 41.

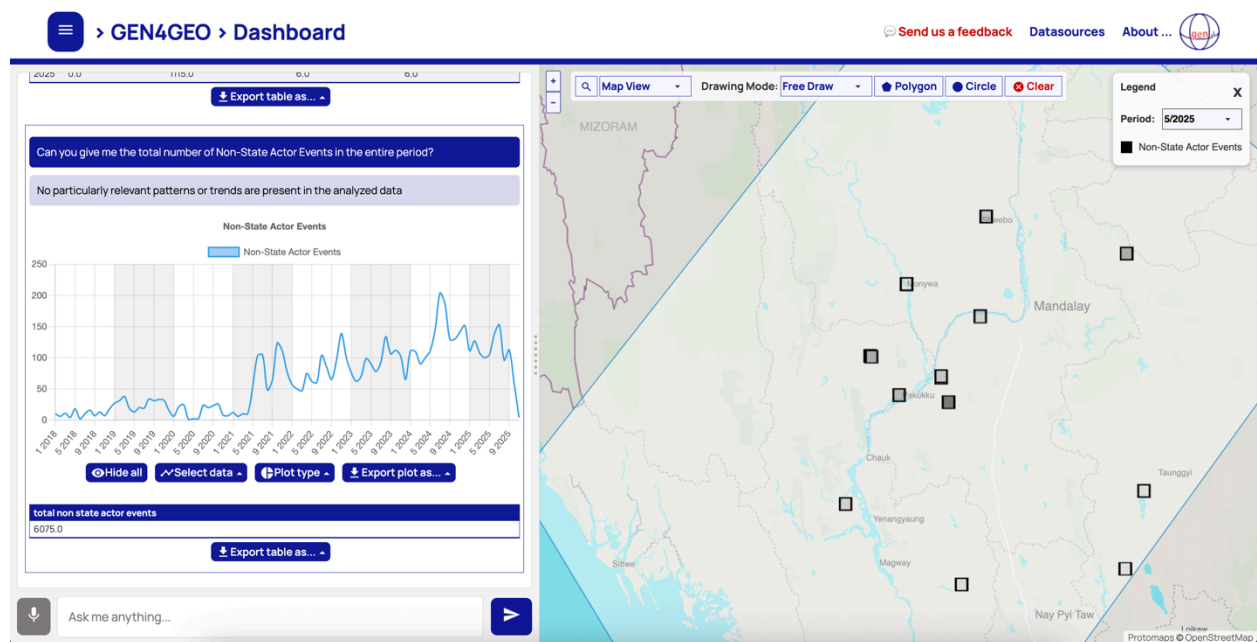


Figure 41 – How to aggregate data along the time dimension.

You can also ask GEN4GEO to compute correlations. For example, by asking “For each region compute the R parameter of correlation between crop extent and conflicts UCDP”, GEN4GEO tests the correlation between crop extent and conflicts on data aggregated at regional level. Results are shown in Figure 42.

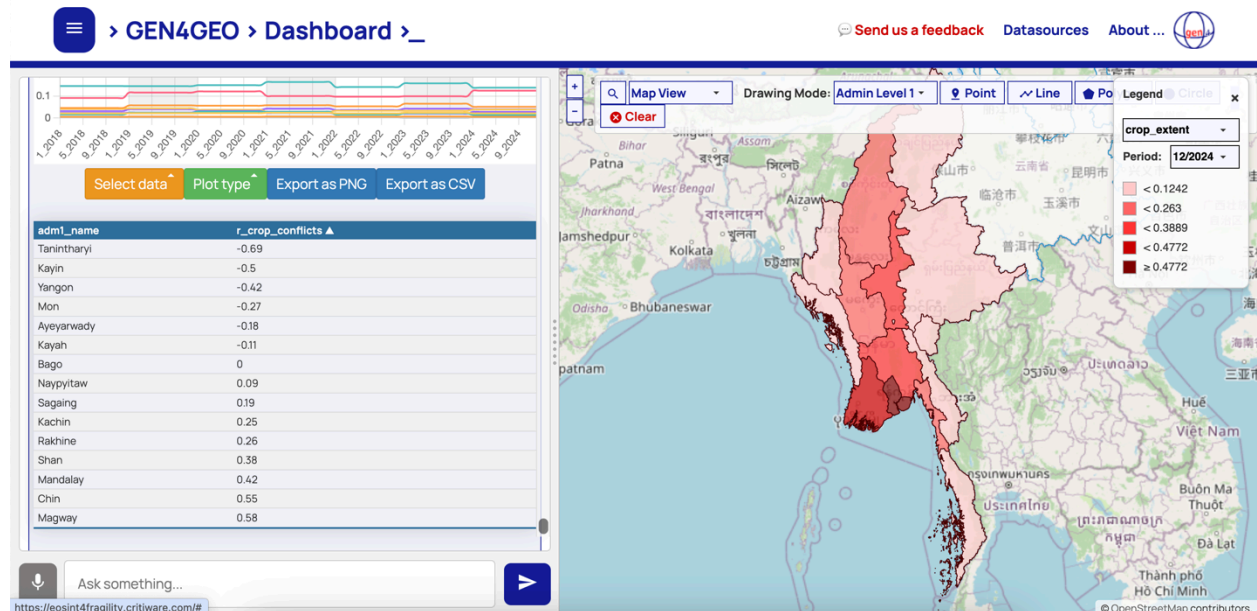


Figure 42 – How to test the correlation between variables.

6.3 How to generate a default prompt through the Datasources section

As anticipated at the end of section 2.2, the indicators shown in the Datasources section are clickable and can be used to generate a default prompt in an automatic way. By clicking an indicator, a default prompt appears in the chat, as shown in Figure 10. The question can be fully customized before you send it and uses the name of the indicator as it is displayed in the Datasources section.

For instance, Figure 10 shows an example of a prompt generated by clicking the ‘Precipitation (monthly total)’ indicator.

The preliminary step before clicking the indicator is always the selection of a Navigation Mode and an area of interest, as explained in section 2.1, otherwise the questions will be answered for all the available countries at ADMIN 0.

The automatic prompt that appears in the chat is automatically adapted to the selected navigation mode. For instance, if you are navigating at admin 0 level, as in the example in Figure 10, the question asks to show data ‘per country’.

While generating an automatic prompt, you may encounter the warning shown in Figure 43: this happens if you select an indicator that is unavailable at the spatial granularity required by the

current navigation mode; to understand the maximum resolution of an indicator, look at the 'Granularity' field in the Datasources section associated to that indicator (Figure 44):

- If the resolution is 'Geohash (1km x 600m)', the indicator is available also at coarser levels, namely district, province and country level (e.g. 'Wounded in Non-State Actor Events', Figure 44)
- If the resolution is 'Admin 2', the indicator is available at province and country level, but not at geohash level
- If the resolution is 'Admin 1', the indicator is available at province and country level, but not at district and geohash level ('Years of education', Figure 44)
- If the resolution is 'Admin 0', the indicator is available only at country level (e.g. 'Young Persons Literacy Rate', Figure 44)

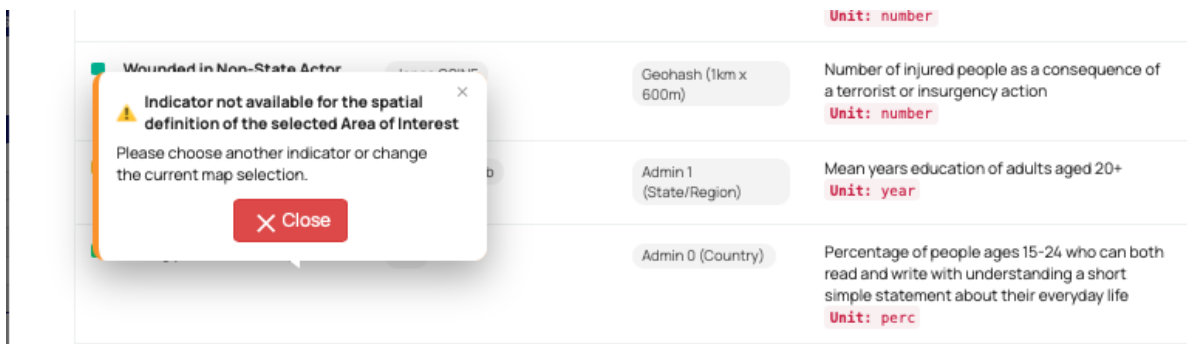


Figure 43 – Warning when clicking an indicator in the Datasources section that cannot be inspected at the selected spatial granularity.

	Wounded in Non-State Actor Events	Janes OSINT	Geohash (1km x 600m)	Number of injured people as a consequence of a terrorist or insurgency action Unit: number
	Years of education	Global data lab	Admin 1 (State/Region)	Mean years education of adults aged 20+ Unit: year
	Young persons literacy rate	WB	Admin 0 (Country)	Percentage of people ages 15-24 who can both read and write with understanding a short simple statement about their everyday life Unit: perc

 Close

Figure 44 – Resolution of indicators in the Datasources section

7. Intelligent search

The buttons in Figure 45 activate the intelligent search functionalities.

The left button with the paper click icon enables you to search in a pdf loaded from your local machine, while the button with magnifying glass icon on the right enables you to search on the web.



Figure 45 – Search in pdf and in web buttons

When activating the search in pdf functionality, the popup in Figure 46 appears. After you upload your pdf, ask a question in the chat.

Figure 47 shows an example of data extracted from a document about Mozambique.

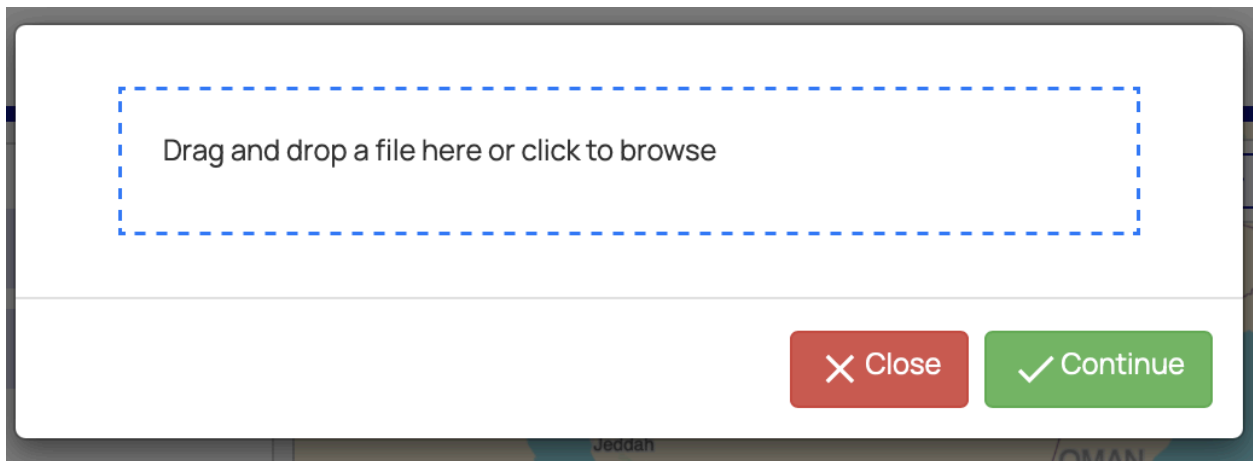


Figure 46 – Pop-up of the pdf search to upload a PDF document

Make a summary of the document and extract the arrivals by locality/village

Summary

Between 01-19 May 2026, attacks and fear of attacks by Non-State Armed Groups (NSAGs) in Ancuabe District triggered displacements across Ancuabe, Montepuez, and Chiure Districts in Cabo Delgado, Mozambique. A total of 15,286 individuals (4,886 households) were displaced, with the largest concentrations in established sites: Nanjua A and B (5,206 individuals), Namanhumbir Sede (4,215 individuals), and Centro de Maningane (1,877 individuals). The displaced population comprises 3,204 men (21%), 4,301 women (28%), and 7,781 children (51%). Primary transportation modes were by foot and bus. Protection concerns include family separation, gender-based violence, loss of documentation, and psychosocial distress. All displaced individuals require food, shelter, and non-food items (NFIs).

Arrivals by Locality/Village

Village/Site	Men	Women	Under 18	Households	Total
Ancuabe	2,278	2,901	4,015	3,499	9,194
Nanjua A	742	952	1,139	1,214	2,833
Nanjua B	508	618	1,247	1,180	2,373
Aldeia de Muaja	513	560	140	280	1,213
Milamba 2	129	156	600	215	885
Mesa Sede	152	173	266	249	591
Aldeia de Nacololo	80	96	315	113	491
Aldeia de Majasse	56	160	116	55	332
Aldeia de Namapa	40	84	67	124	191
Centro de Marocani	21	32	72	33	125
Aldeia de Nsanja	20	52	18	15	90
Centro de Milamba Expansão	14	15	23	18	52
Bairro de Ntutu	3	3	12	3	18
Montepuez	678	972	2,565	864	4,215
Namanhumbir Sede	678	972	2,565	864	4,215
Chiure	248	428	1,201	523	1,877
Centro de Maningane	248	428	1,201	523	1,877
Grand Total	3,204	4,301	7,781	4,886	15,286

Figure 47 – Example of answer using the pdf search functionality

To activate the ‘search on the web’ functionality instead, click the related button, it will become green.

Before submitting your question, check the drop-down menu shown in Figure 48. You can choose one or more of the predefined links or add your own. In this case, the web search engine will search for information only within the selected websites.

If you do not specify any links, the web search engine will search the broader web and retrieve information from webpages selected according to its own search criteria.

Figure 49 shows an example of information retrieved from <https://peacemaker.un.org> website. The bottom part of the answer points to the web pages used to retrieve the answer.

Peace agreements in Myanmar

Based on the provided texts, there are multiple peace agreements related to Myanmar documented in the Peace Agreements Database. The agreements include:

Recent Myanmar Peace Agreements:

- Chairman's Statement on the ASEAN Leaders' Meeting: Five Point Consensus on Myanmar (24/04/2021)
- Union Accord Part III (21/08/2020)

Earlier Myanmar Peace Agreements (2011-2012):

- Rakhine State Liberation Party (RSLP) and State Government Peace-Making Group 5-point State-level Agreement (05/04/2012)
- NMSP Government 4-point Union-level Peace Agreement (25/02/2012)
- Agreement between the State-Level Peace-Making Team and the KNU/KNLA Peace Council (07/02/2012)
- Initial Agreement between Mon State Level Peace-Making Group and the New Mon State Party (NMSP) (01/02/2012)
- Agreement between the Union Level Peace-Making Team and the Shan State Progressive Party/Shan State Army (28/01/2012)
- Agreement between the State-Level Peace-Making Team and the Shan State Progressive Party/Shan State Army (28/01/2012)
- SSA-S Government 11-Point Peace Agreement (16/01/2012)
- Statement on Initial Agreement between KNU and Burmese Government (13/01/2012)
- Chin National Front (CNF) and Government 9-point State-level Peace Agreement (06/01/2012)
- Agreement between the Government and the Mongla Armed Group (30/12/2011)
- Agreement between "Wa" Special Region and the Government (28/12/2011)
- NDAA Government 6-point Union-level Peace Agreement (27/12/2011)
- Kalo Htoo Baw (DKBA-5) Government Union Level Peace Agreement (11/12/2011)
- SSA-S Government Ceasefire Agreement (02/12/2011)
- Kalo Htoo Baw (DKBA-5), Government State Level Peace Agreement (03/11/2011)
- NDAA Ceasefire Agreement (07/09/2011)

All agreements are classified as Intra-State conflicts and are available in English.

References: <https://peacemaker.un.org/en/areas-of-work/peace-agreements-database-and-language-of-peace-tool/peace-agreements-search>, <https://peacemaker.un.org/en/areas-of-work/peace-agreements-database-and-language-of-peace-tool>, <https://peacemaker.un.org/en>, <https://peacemaker.un.org/en/node/9158>, <https://peacemaker.un.org/en/areas-of-work/peace-agreements-database-and-language-of-peace-tool/peace-agreements-search?page=3>

Figure 49 – Example of web search answer

